




SINGLE ROW LIGHT SERIES SINGLE ROW ANGULAR CONTACT BALL BEARINGS 7200 SERIES

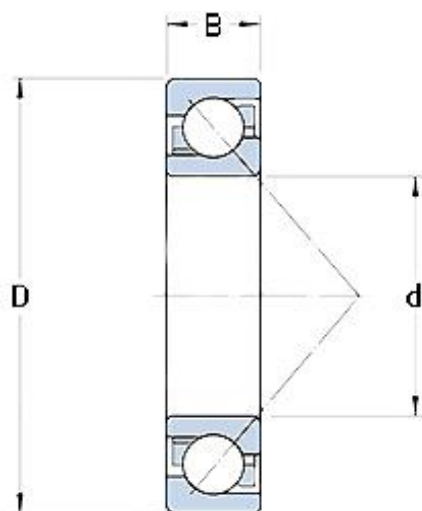

Part Number	Dimensions			Load Rating		Weight (kg)
	d	D	B	Dynamic (N)	Static (N)	
7200B	10	30	9	4300	2000	0.032
7200B-2RS	10	30	9	4300	2000	0.032
7201B	12	32	10	6950	3400	0.039
7201B-2RS	12	32	10	6950	3400	0.039
7202B	15	35	11	7450	3950	0.048
7202B-2RS	15	35	11	7450	3950	0.048
7203B	17	40	12	9350	5050	0.069
7203B-2RS	17	40	12	9350	5050	0.069
7204B	20	47	14	13300	7700	0.11
7204B-2RS	20	47	14	13300	7700	0.11
7205B	25	52	15	14000	8700	0.13
7205B-2RS	25	52	15	14000	8700	0.13
7206B	30	62	16	19400	12500	0.217
7206B-2RS	30	62	16	19400	12500	0.217
7207B	35	72	17	28100	18600	0.313
7207B-2RS	35	72	17	28100	18600	0.313
7208B	40	80	18	30600	21300	0.402
7208B-2RS	40	80	18	30600	21300	0.402
7209B	45	85	19	34300	24300	0.46
7209B-2RS	45	85	19	34300	24300	0.46
7210B	50	90	20	35700	26700	0.51
7210B-2RS	50	90	20	35700	26700	0.51
7211B	55	100	21	44100	33800	0.68
7211B	55	100	21	44100	33800	0.68
7212B	60	110	22	53400	41600	1.02
7213B	65	120	23	60900	49300	1.09
7214B	70	125	24	63200	50600	1.18
7215B	75	130	25	71700	59300	1.32
7216B	80	140	26	77100	65000	1.57
7217B	85	150	28	89200	76000	2.01
7218B	90	160	30	102000	88000	2.47
7219B	95	170	32	111000	94000	3.02
7220B	100	180	34	124000	107000	3.62

Cage Materials: Steel / Nylon

Suffix guide: B = 40° Contact Angle / 2RS = 2 Rubber Seals