



Unfixed Bearings — Non-standard


Non-Relubricate — Triple lip seal(s)

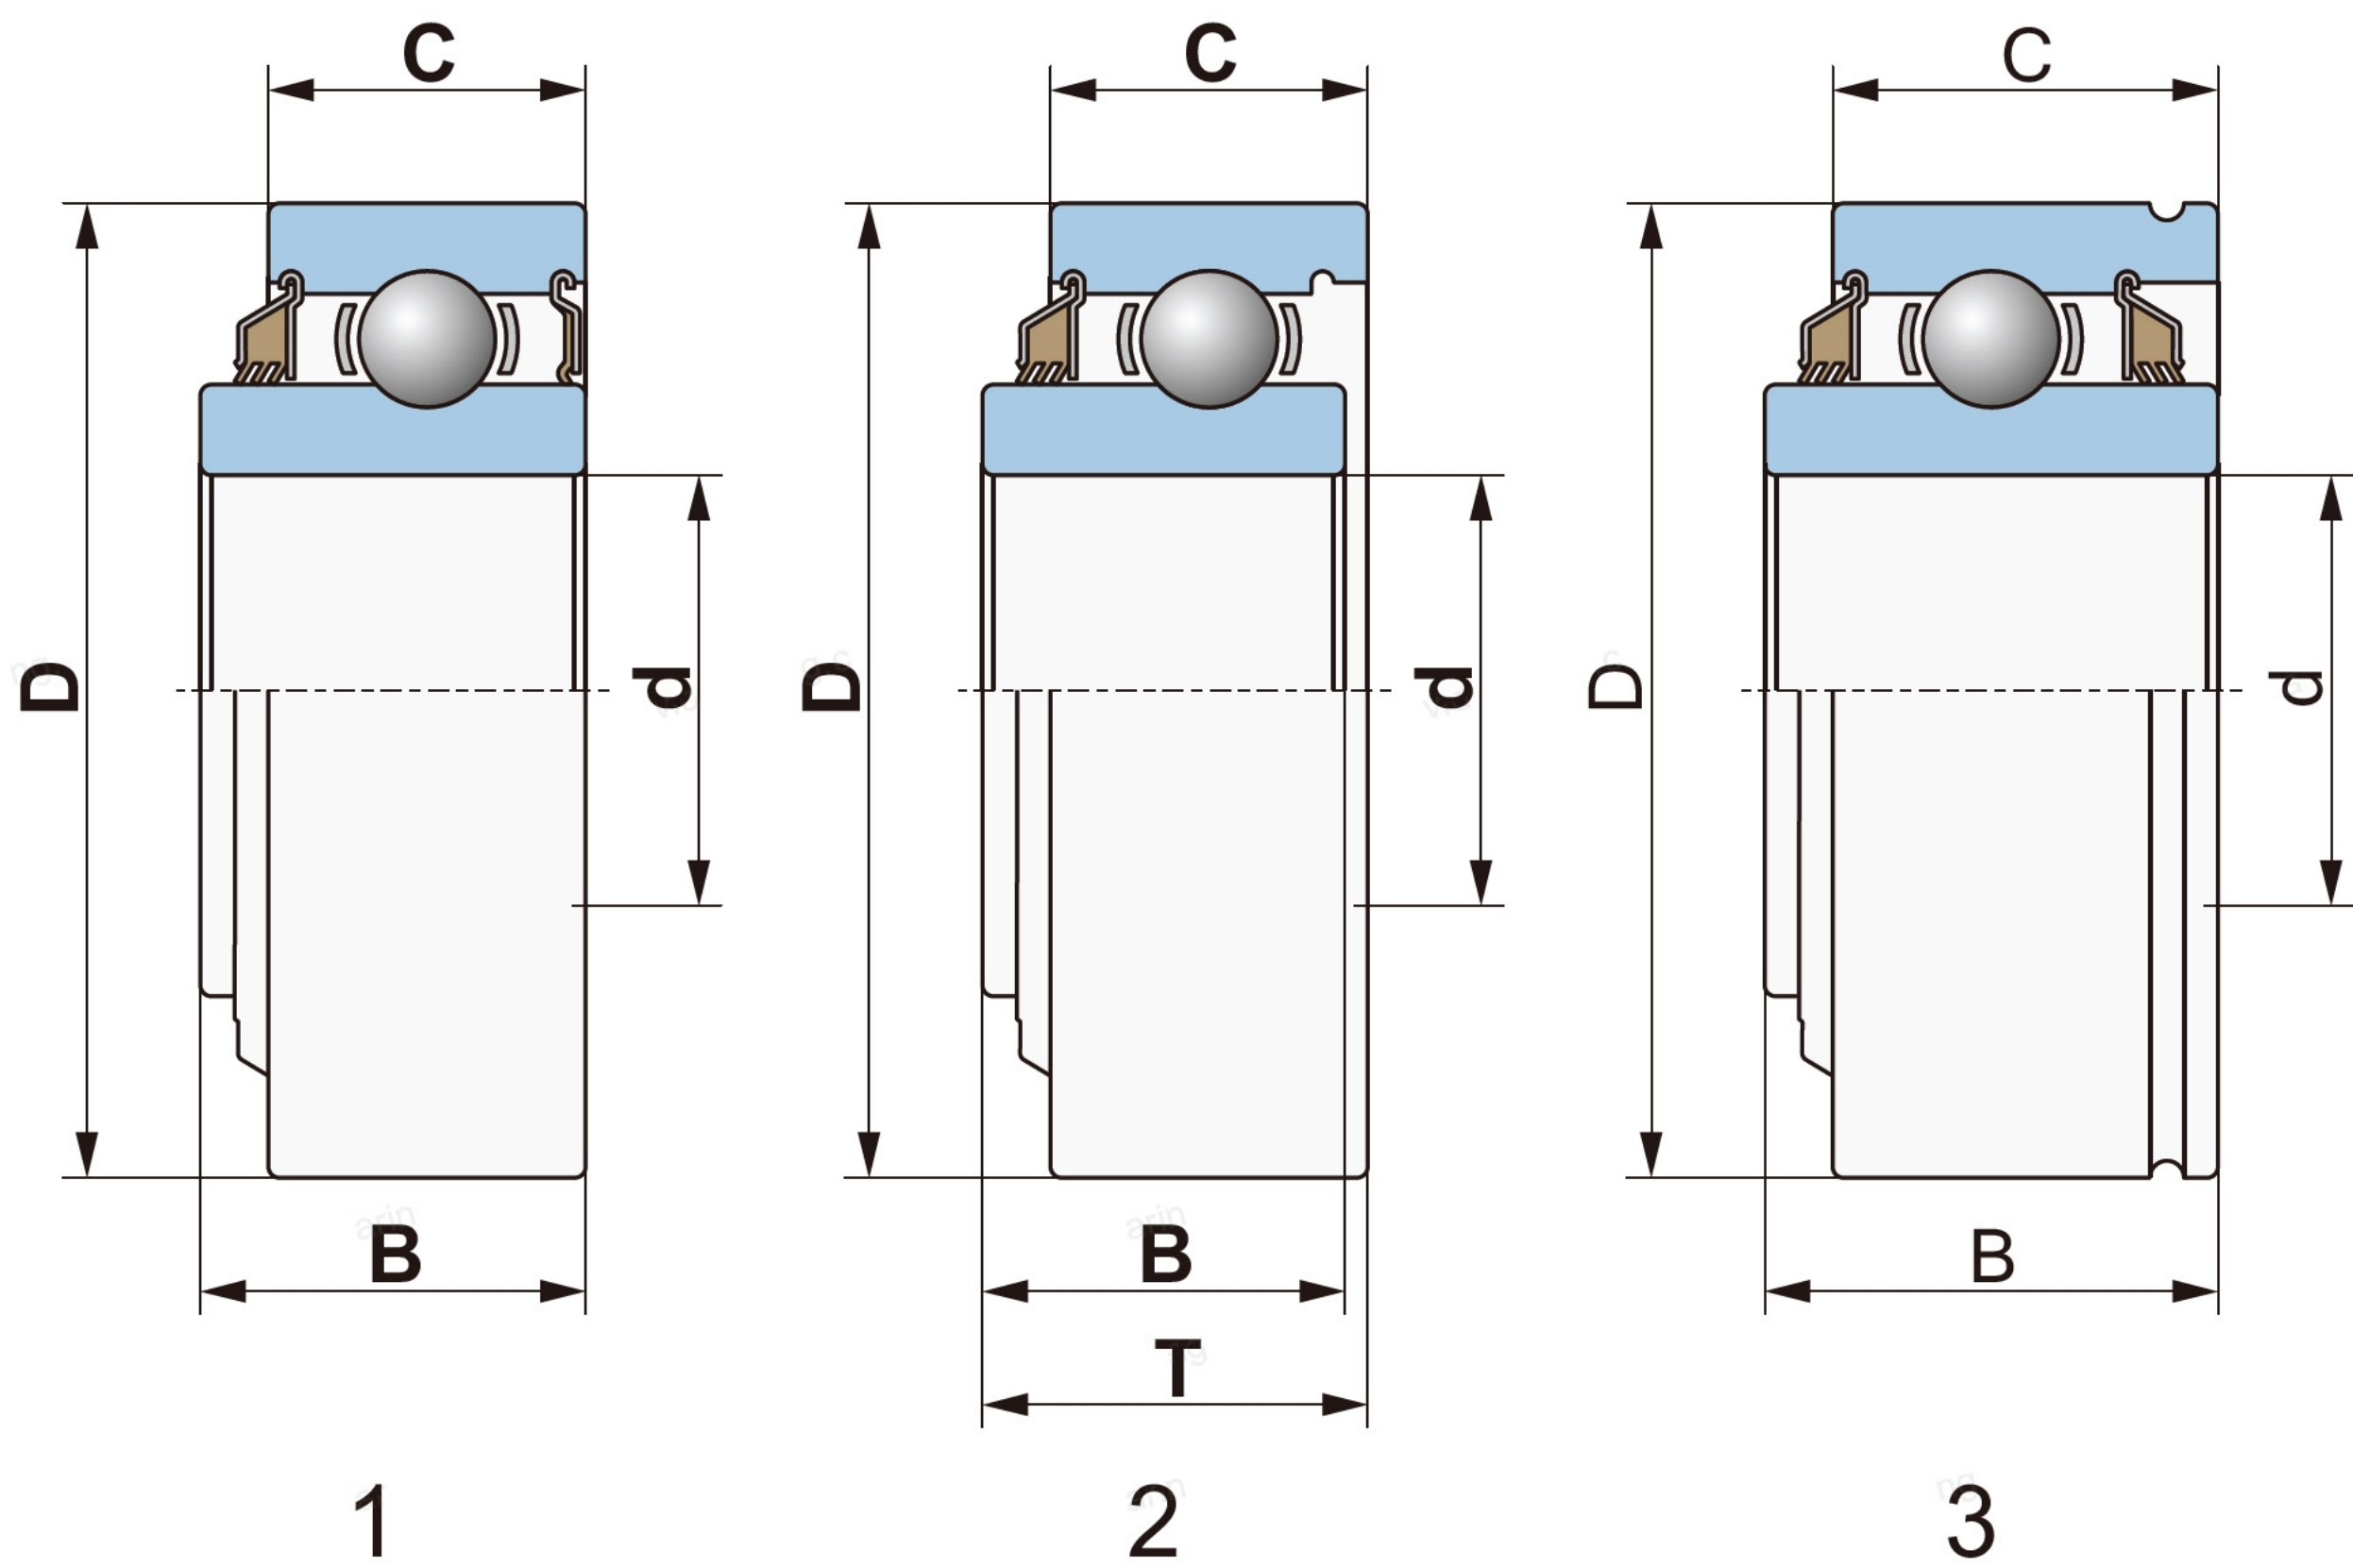

Non-Relubricate — Double lip seal(s)

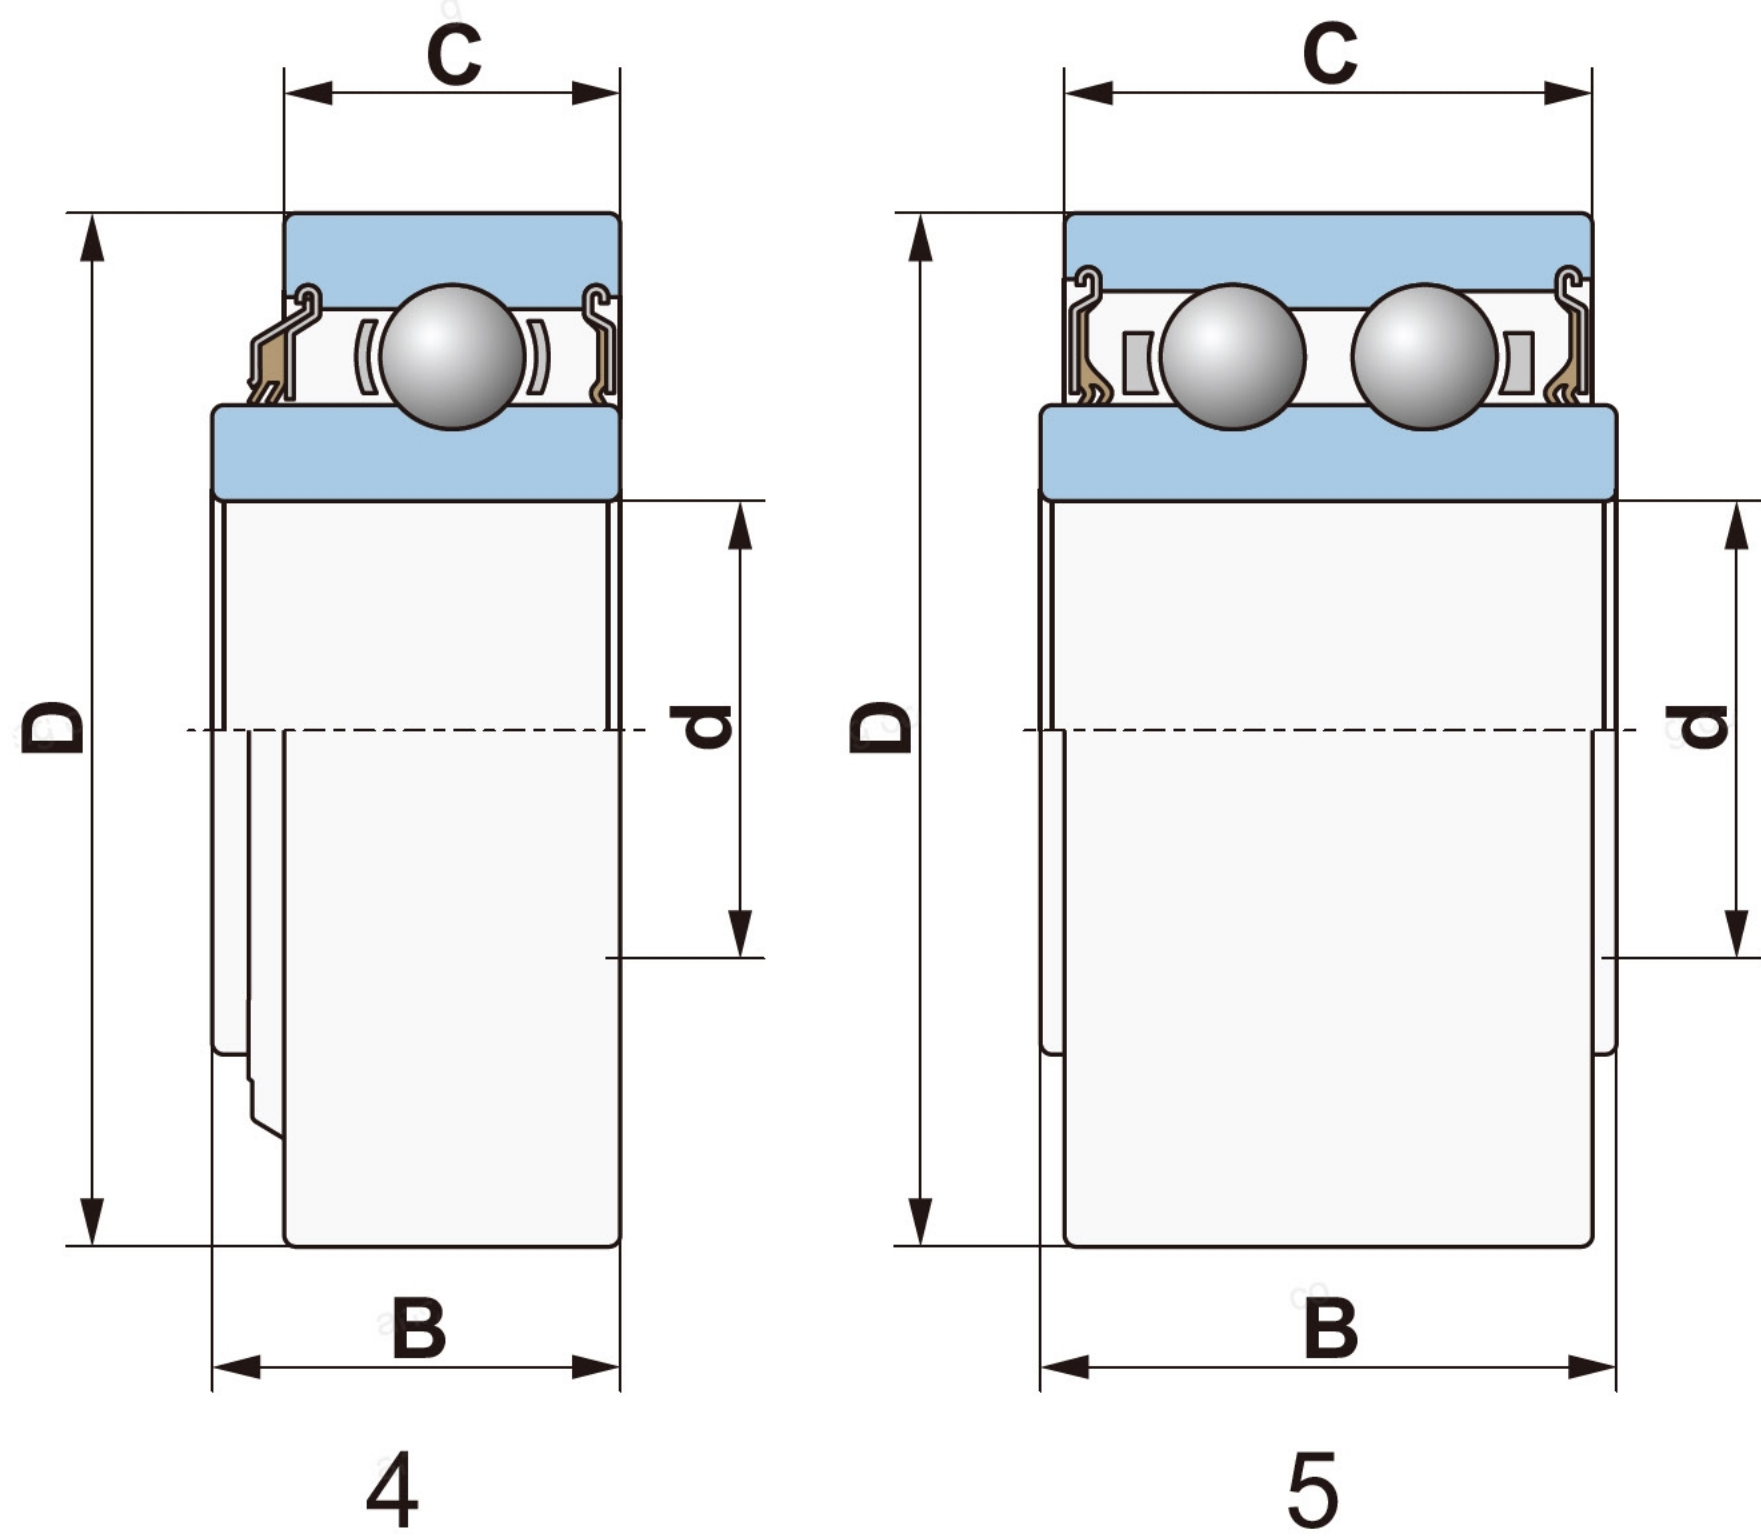

Non-Relubricate — Single lip seals

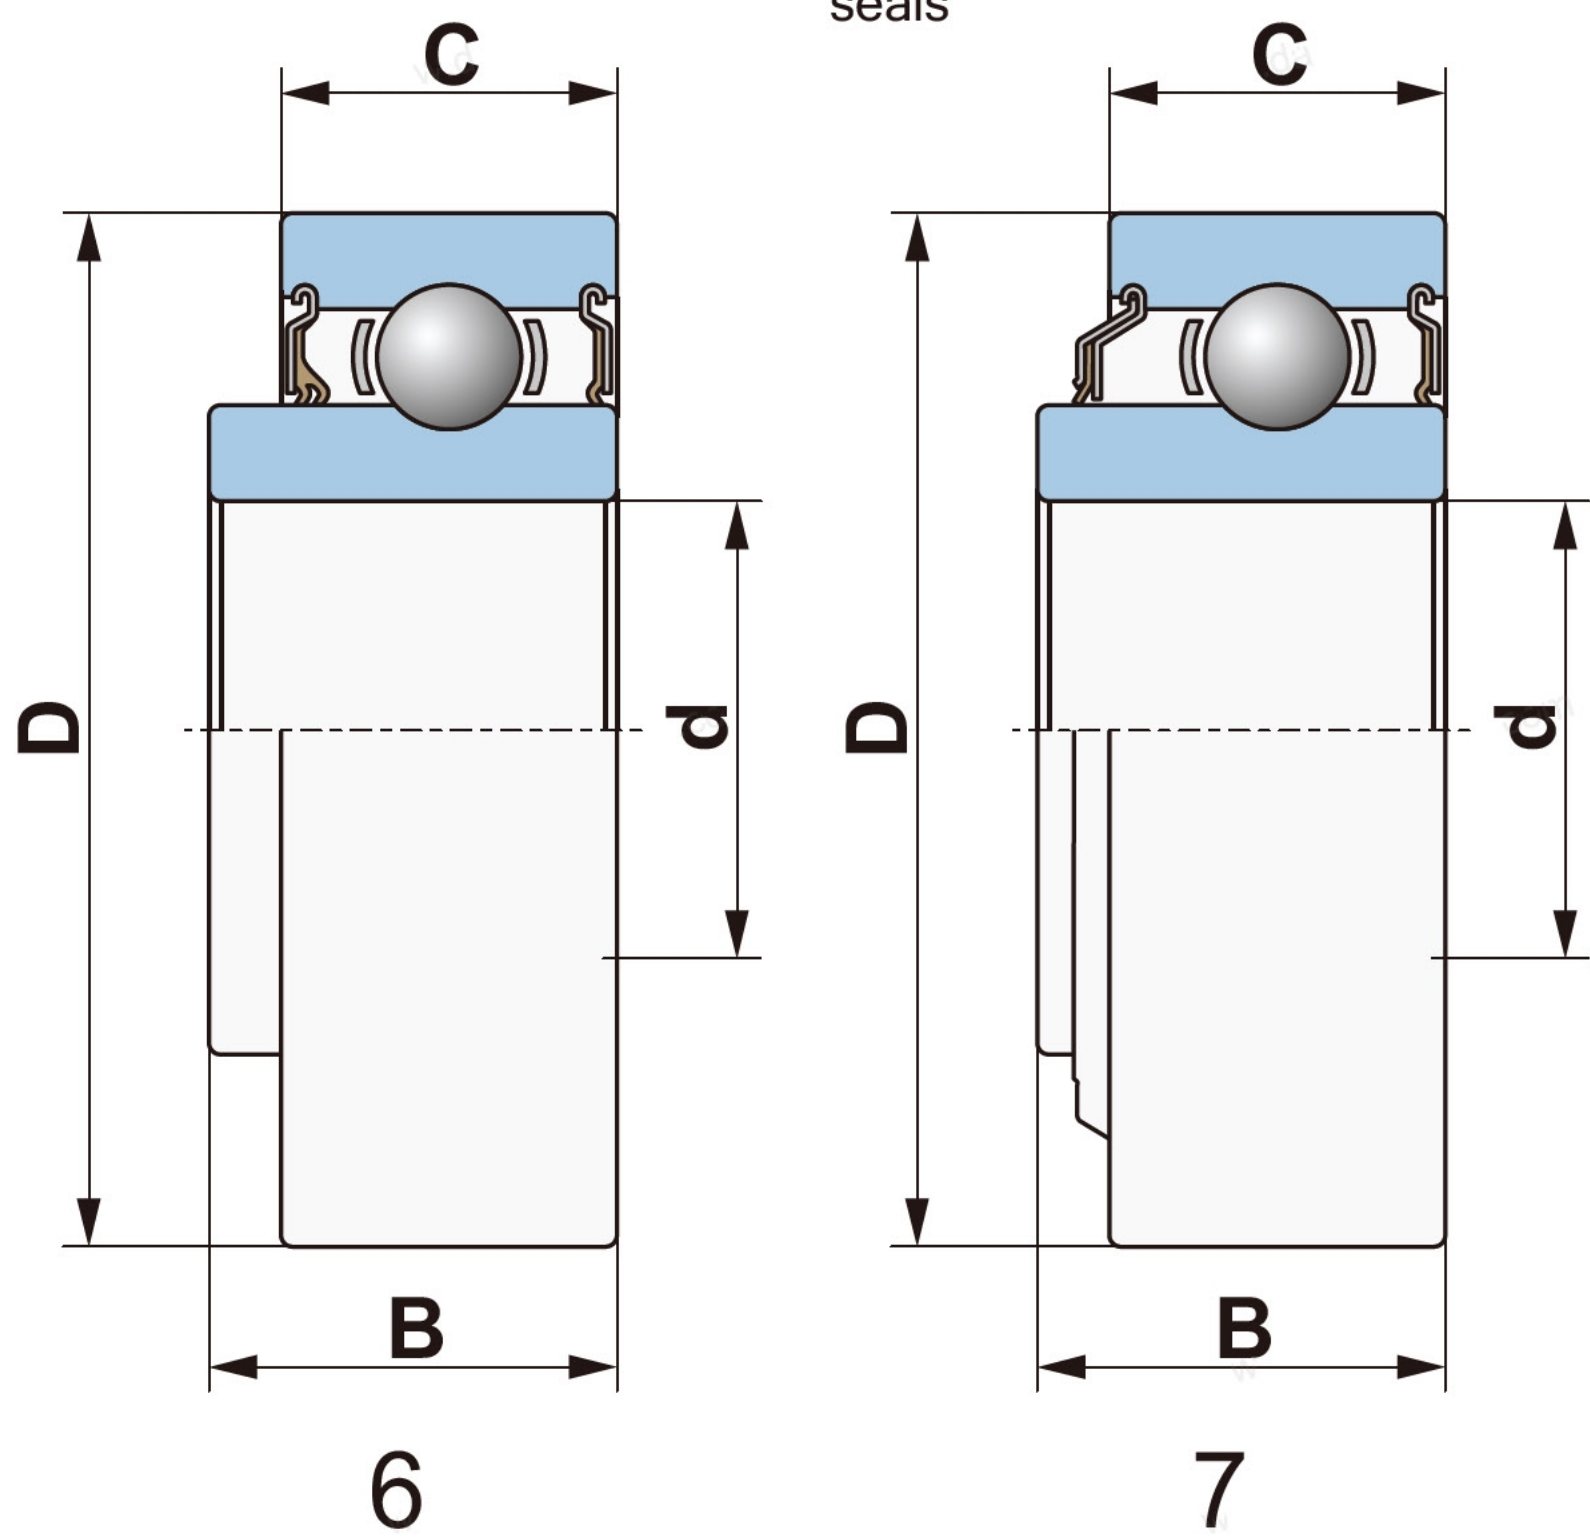

Designation			d, mm	D, mm	B, mm	C, mm	T, mm	Load Rating N		Weight, kg
								Dynamic	Static	
5203	KYY2	5	16,256	40,000	43,800	28,930		17.200	9.500	0,218
203	KYP2	4	17,000	40,000	14,000	12,000		9.600	4 000	0,060
204	PY3	6	16,027	45,225	18,670	15,400		12 800	6.600	0,130
204	RY2	4	16,027	45,225	18,670	15,400		12.800	6.600	0,130
204	KRD4	7	16,000	47,000	17,400	14,000		12.800	6.600	0,150
205	KRP2	1	19,050	52,000	21,031	15,000		14.100	7.200	0,190
205	KP6	2	19,050	52,000	23,390	17,870	24,920	14.100	7 200	0,220
205	GP	3	16,130	53,086	19,400	18,240		14 100	7.200	2,150
206	KRP2	1	25,000	62,000	22,225	18,000		19.500	10.400	0,300