


EA-D SERIES STEEL/PTFE MAINTENANCE FREE MALE ROD ENDS

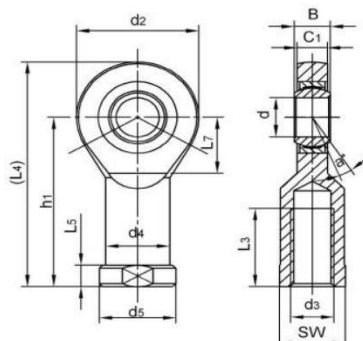

Bearing No.	Dimensions(mm)									Ball Diameter	a° angle	Load ratings (KN)		Weight (kg)
	d	B	C1	d2	d3-6G	h1	L1	L2	L7			Dynamic	Static	
EA6D	6	6	4.5	21	M6	36	16	46.5	12	10	13	3.6	6.9	0.017
EA8D	8	8	6.5	24	M8	42	21	54	13	13	15	5.8	12.9	0.029
EA10D	10	9	7.5	29	M10	48	26	62.5	16	16	12	8.6	17.6	0.044
EA12D	12	10	8.5	34	M12	54	28	71	18	18	10	11	24.5	0.066
EA15D	15	12	10.5	40	M14	63	34	83	22	22	8	18	36	0.121
EA17D	17	14	11.5	46	M16	69	36	92	24	25	10	22	45	0.172
EA17D-2RS	17	14	11.5	46	M16	69	36	92	24	25	10	22	45	0.172
EA20D	20	16	13.5	53	M20X1.5	78	43	104.5	27	29	9	31	60	0.283
EA20D-2RS	20	16	13.5	53	M20X1.5	78	43	104.5	27	29	9	31	60	0.283
EA25D	25	20	18	64	M24x2	94	53	126	33	35.5	7	51	83	0.504
EA25D-2RS	25	20	18	64	M24x2	94	53	126	33	35.5	7	51	83	0.504
EA30D	30	22	20	73	M30x2	110	65	146.5	37.5	40.7	6	65	110	0.835
EA30D-2RS	30	22	20	73	M30x2	110	65	146.5	37.5	40.7	6	65	110	0.835
EA35D-2RS	35	25	22	82	M36x3	140	82	181	41	47	6	112	146	1.410
EA40D-2RS	40	28	24	92	M39x3	150	86	196	47	53	7	140	180	1.860
EA45D-2RS	45	32	28	102	M42x3	163	92	214	52	60	7	180	240	2.570
EA50D-2RS	50	35	31	112	M45x3	185	104	241	60	66	6	220	290	3.580
EA60D-2RS	60	44	39	135	M52x3	210	115	277.5	75.5	80	6	345	450	5.730
EA70D-2RS	70	49	43	160	M56x4	235	125	315	95	92	6	440	610	7.940

Right Hand Thread as standard

Left Hand Thread also available, prefix becomes EAL, ie EAL8D, EAL30D-2RS

Ball: Gcr15 heat treated steel, HRC58-64, Precision ground and polished

Body: Carbon Steel, Zinc plated

Race: PTFE Composite

Contact surfaces: Steel/PTFE composite

**MIDLAND
BEARINGS**

Midland Bearings Ltd, Unit 33, Second Avenue, Pensnett Trading Estate, Kingswinford, West Midlands, DY6 7UG England

Tel : (0)1384-841400 Fax: (0)1384-841450 sales@midlandbearings.com