




FBL200SSN

3 BOLT BRACKET SERIES

THERMOPLASTIC UNITS

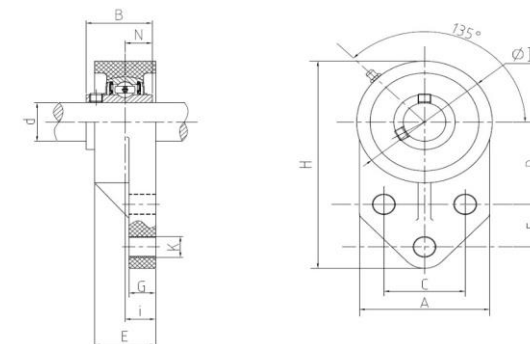

Part Number	Dimensions (mm / in.)												Max.Torque		Bearing Insert	Housing	Weight (kg)
	d	A	C	D	E	F	G	H	I	K	B	N	Bolt D	Nm			
FBL201SSN	12	62.0	38.1	42.9	26.5	22.2	11.4	108.0	63.5	10.7	31.0	12.7	M10	18	SS-UC201	FBL204	0.25
FBL201-8SSN	1/2"	2-7/16	1-1/2	1-11/16	1-3/64	7/8	29/64	4.1/4	2-1/2	27/64	1-17/32	1/2	3/8	18	SS-UC201-8	FBL204	0.25
FBL202SSN	15	62.0	38.1	42.9	26.5	22.2	11.4	108.0	63.5	10.7	31.0	12.7	M10	18	SS-UC202	FBL204	0.25
FBL203SSN	17	62.0	38.1	42.9	26.5	22.2	11.4	108.0	63.5	10.7	31.0	12.7	M10	18	SS-UC203	FBL204	0.25
FBL204SSN	20	62.0	38.1	42.9	26.5	22.2	11.4	108.0	63.5	10.7	31.0	12.7	M10	18	SS-UC204	FBL204	0.25
FBL204-12SSN	3/4"	2-7/16	1-1/2	1-11/16	1-3/64	7/8	29/64	4.1/4	2-1/2	27/64	1-7/32	1/2	3/8	18	SS-UC204-12	FBL204	0.25
FBL205SSN	25	63.5	41.3	46.0	34.0	28.6	11.4	120.6	70.0	10.7	36.5	14.3	M10	25	SS-UC205	FBL205	0.30
FBL205-16SSN	1"	2-1/2	1-5/8	1-13/16	1-11/32	1-1/8	29/64	4-3/4	2-3/4	27/64	1-7/16	9/16	3/8	25	SS-UC205-16	FBL205	0.30
FBL206SSN	30	76.0	47.6	52.4	32.0	31.8	13.3	138.5	83.0	10.7	38.1	15.9	M10	30	SS-UC206	FBL206	0.46
FBL206-20SSN	1-1/4"	3	1-7/8	2.1/16	1-17/64	1-1/4	33/64	5-29/64	3-17/64	27/64	1-1/2	5/8	3/8	30	SS-UC206-20	FBL206	0.46
FBL207SSN	35	89.0	50.8	60.3	36.5	31.8	16.1	157.0	95.0	13.1	42.9	17.5	M12	35	SS-UC207	FBL207	0.66
FBL207-20SSN	1-1/4"	3.1/2	2	2.3/8	1-7/16	1-1/4	41/64	6-3/16	3-47/64	33/64	1-3/4	11/16	7/16	35	SS-UC207-20	FBL207	0.66
FBL208SSN	40	78.0	50.0	60.0	36.0	41.0	16.0	164.0	100.0	13.1	49.2	19.0	M12	40	SS-UC208	FBL208	0.78
FBL208-24SSN	1-1/2"	3-5/64	1-31/32	2-23/64	1-27/64	1-39/64	5/8	6-15/32	3-15/16	33/64	1-15/16	3/4	7/16	40	SS-UC208-24	FBL208	0.78
FBL209SSN	45	80.0	54.0	65.0	38.0	43.0	18.0	174.0	106.0	13.1	49.2	19.0	M12	40	SS-UC209	FBL209	0.92
FBL210SSN	50	86.0	58.0	68.0	40.0	46.0	18.0	184.0	112	13.1	51.6	19.0	M12	40	SS-UC210	FBL210	1.12
FBL210-32SSN	2"	3-3/8	2-9/32	2-11/16	1-37/64	1-13/16	23/32	7-1/4	4-13/32	33/64	2-1/32	0.750	7/16	40	SS-UC210-32	FBL210	1.12

Thermoplastic Housings are made in a High-grade glass-filled thermoplastic polyester, which has a high tensile strength and can operate in temperatures to 102°C

Colours: Sizes up to 50mm (2") are available in Black, Green and upto 40mm (1.1/2") in White

*End Caps matching the colours stated are normally available, open design caps are only available in Green or White up to 40mm

Other bearing inserts designs will also fit in these housings, see for example: SS-SA204 to SS-SA210 / SS-SB204 to SS-SB210 / SS-UCX05 TO SS-UCX09