




SS-UCPA200

Fully Stainless Steel Short Base Tapped Pillow Block Unit

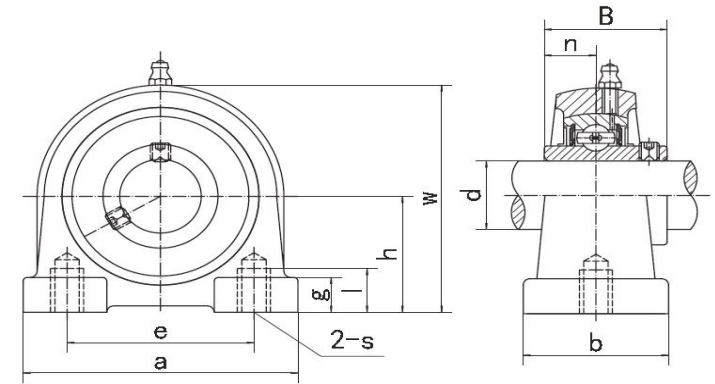

Part Number	Dimensions											Bolt Size (mm)	Bearing Insert	Housing	Weight (kg)
	d	h	a	e	b	s	g	l	w	B	n				
SS-UCPA201	12	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC201	SS-PA204	0.63
SS-UCPA201-8	1/2"	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC201-8	SS-PA204	0.62
SS-UCPA202	15	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC202	SS-PA204	0.61
SS-UCPA203	17	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC203	SS-PA204	0.59
SS-UCPA204	20	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC204	SS-PA204	0.59
SS-UCPA204-12	3/4"	30.2	76	52	40	M10	11	15	62	31	12.7	M10	SS-UC204-12	SS-PA204	0.76
SS-UCPA205	25	36.5	84	56	38	M10	12	15	72	34.1	14.3	M10	SS-UC205	SS-PA205	0.75
SS-UCPA205-16	1"	36.5	84	56	38	M10	12	15	72	34.1	14.3	M10	SS-UC205-16	SS-PA205	1.12
SS-UCPA206	30	42.9	94	66	50	M14	12	18	84	38.1	15.9	M14	SS-UC206	SS-PA206	1.11
SS-UCPA206-20	1-1/4"	42.9	94	66	50	M14	12	18	84	38.1	15.9	M14	SS-UC206-20	SS-PA206	1.55
SS-UCPA207	35	47.6	110	80	55	M14	13	20	95	42.9	17.5	M14	SS-UC207	SS-PA207	1.61
SS-UCPA207-20	1-1/4"	47.6	110	80	55	M14	13	20	95	42.9	17.5	M14	SS-UC207-20	SS-PA207	1.80
SS-UCPA208	40	49.2	116	84	58	M14	13	20	100	49.2	19	M14	SS-UC208	SS-PA208	1.84
SS-UCPA208-24	1-1/2"	49.2	116	84	58	M14	13	20	100	49.2	19	M14	SS-UC208-24	SS-PA208	2.05
SS-UCPA209	45	54.2	120	90	60	M14	13	25	108	49.2	19	M14	SS-UC209	SS-PA209	2.34
SS-UCPA210	50	57.2	130	94	64	M16	14	25	116	51.6	19	M16	SS-UC210	SS-PA210	2.56
SS-UCPA210-32	2"	57.2	130	94	64	M16	14	25	116	51.6	19	M16	SS-UC210-32	SS-PA210	2.54

Housings : AISI304C. Standard Insert Bearings: SS-UC200 : AISI420C (See SS-UC200 for further details) - Other bearings type will fit in these units, See SS-SA200 / SS-SB200 / SS-UCX--
All housings are available seperately without insert. The diagram shows a standard recessed casting, but many units are also available from stock with a solid base - please ask for details