


KA-D SERIES STEEL/PTFE LINED MAINTENANCE FREE MALE ROD ENDS

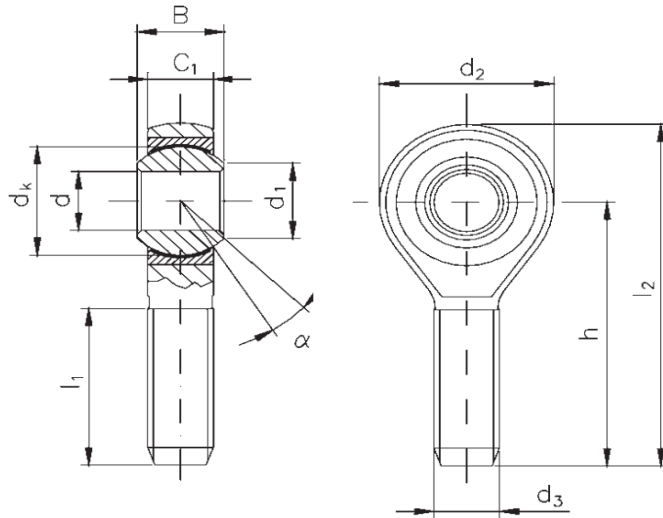

Bearing Reference	Dimensions(mm)									Ball dia	a ₀ mis. angle	Load ratings (KN)		Weight (Kg)
	d H7	l ₃ min	C1	d1	d2	d3-6g	h1	dk	l4			Dynamic	Static	
KA6D	6	9	6.75	8.9	21	M6	30	12.7	40.5	9	13	4.7	6.8	0.025
KA8D	8	12	9	10.3	25	M8	36	15.8	48.5	12	13	7.7	12.3	0.043
KA10D	10	15	10.5	12.9	29	M10	43	19	57.5	14	15	10.4	17.3	0.072
KA12D	12	18	12	15.4	33	M12	50	22.2	66.5	16	15	13.5	22.7	0.107
KA16D	16	24	15	19.3	43	M16	64	28.5	94.5	21	15	21	35.1	0.21
KA18D	18	27	16.5	21.8	47	M18X1.5	71	31.7	102.5	23	15	25	43.2	0.295
KA20D	20	30	18	24.3	51	M20X1.5	77	34.9	111.5	25	15	29.8	50.3	0.38

Right Hand Thread

Ball: Gcr15 heat treated steel, HRC58-64, Precision ground and polished

Body: Carbon Steel, Zinc plated, Chromate treated.

Race: PTFE composite, Brass retainer

Sliding contact surfaces: Steel/PTFE composite

**MIDLAND
BEARINGS**

Midland Bearings Ltd, Unit 33, Second Avenue, Pensnett Trading Estate, Kingswinford, West Midlands, DY6 7UG England

Tel : (0)1384-841400 Fax: (0)1384-841450 sales@midlandbearings.com