




LFR SERIES LOCATING BEARING TRACK ROLLERS

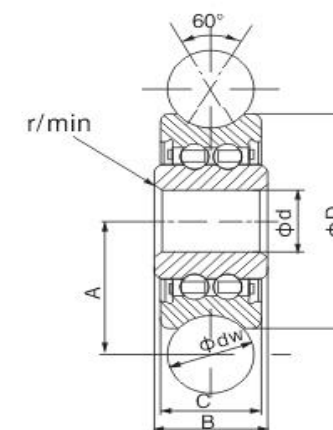

PART NUMBER / ALTERNATIVE PART NUMBER	BORE SIZE (d)	OUTSIDE DIAMETER (D)	INNER RING WIDTH (B)	OUTER RING WIDTH (C)	Radii (r min)	dw	A	Dynamic Load as Track Roller Cw (N)	Static Load as Track Roller Cow (N)	Weight (Kg)
LFR50/5KDD (LFR50/5-6-2Z)	5	17	8.00	7.00	0.2	6	10.50	1580	900	0.010
LFR50/5NPP (LFR50/5-6-2RS)	5	17	8.00	7.00	0.2	6	10.50	1580	900	0.010
LFR50/8KDD (LFR50/8-6-2Z)	8	24	11.00	11.00	0.3	6	14.00	4000	2350	0.020
LFR50/8NPP (LFR50/8-6-2RS)	8	24	11.00	11.00	0.3	6	14.00	4000	2350	0.020
LFR5201KDD (LFR5201-10-2Z)	12	35	15.90	15.90	0.6	10	20.65	8300	5150	0.080
LFR5201NPP (LFR5201-10-2RS)	12	35	15.90	15.90	0.6	10	20.65	8300	5150	0.080
LFR5201-12KDD (LFR5201-12-2Z)	12	35	15.90	15.90	0.6	12	21.75	8300	5150	0.080
LFR5201-12NPP (LFR5201-12-2RS)	12	35	15.9	15.9	0.6	12	21.75	8300	5150	0.080
LFR5204-14KDD (LFR5201-14-2Z)	20	52	22.60	20.60	1.0	16	31.50	15000	10200	0.220
LFR5204-14NPP (LFR5201-14-2RS)	20	52	22.60	20.60	1.0	16	31.50	15000	10200	0.220
LFR5204-16KDD (LFR5201-16-2Z)	20	52	22.60	20.60	1.0	16	31.50	15000	10200	0.230
LFR5204-16NPP (LFR5201-16-2RS)	20	52	22.60	20.60	0.6	16	31.50	15000	10200	0.230
LFR5206-20KDD (LFR5206-20-2Z)	25	72	25.80	23.80	0.6	20	41.00	22500	16400	0.430
LFR5206-25KDD (LFR5206-25-2Z)	25	72	25.80	23.80	0.6	25	43.50	22000	16000	0.430
LFR5207-30KDD (LFR5207-30-2Z)	30	80	29.00	27.00	1.0	30	51.00	28500	21300	0.660
LFR5208-40KDD (LFR5208-40-2Z)	40	98	38.00	36.00	1.0	40	62.50	38000	29600	1.360
LFR5208-40NPP (LFR5208-40-2RS)	40	98	38.00	36.00	1.0	40	62.50	38000	29600	1.360
LFR5301KDD (LFR5301-10-2Z)	12	42	19.00	19.00	0.6	10	24.00	13000	7800	0.100
LFR5301NPP (LFR5301-10-2RS)	12	42	19.00	19.00	0.6	10	24.00	13000	7800	0.100
LFR5302KDD (LFR5302-10-2Z)	15	47	19.00	19.00	1.0	10	21.75	14000	9000	0.170
LFR5302NPP (LFR5302-10-2RS)	15	47	19.00	19.00	1.0	10	21.75	14000	9000	0.170

LFR SERIES SUFFIX GUIDE : NPP (2RS) = 2 Rubber Seals, KDD (2Z) = 2 Metal Dust Shields