
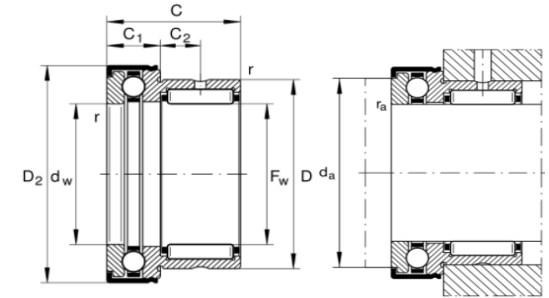


NKX.. / NKX..Z Series Combined Needle Roller Thrust Bearings



Part Number	Weight (g)	Part Number	Weight (g)	Boundary dimensions									Load Ratings						nG	Mounting Dimensions	
				Fw	D	D1 Max	D2 Max	C -0.25	C1 -0.2	C2	dw E8	r min	Dynamic Radial Load C kN	Static Radial Load Co kN	Dynamic Axial Load C kN	Static Axial Load Co kN	Radial Fatigue Load Limit Pu kN	Axial Fatigue Load Limit Pu kN	r/min	da	ra max
NKX10TN	34	NKX10-ZTN	36	10	19	24.1	25.2	23	9	6.5	10	0.3	6.2	7.8	10	14	0.93	0.52	12000	19.7	0.3
NKX12	38	NKX12-Z	40	12	21	26.1	27.2	23	9	6.5	12	0.3	9	11	10.3	15.4	1.52	0.57	11000	21.7	0.3
NKX15	44	NKX15-Z	47	15	24	28.1	29.2	23	9	6.5	15	0.3	10.7	12.7	10.5	16.8	1.76	0.62	9500	23.7	0.3
NKX17	53	NKX17-Z	55	17	26	30.1	31.2	25	9	8	17	0.3	11.9	15	10.8	18.2	2.08	0.67	8500	25.7	0.3
NKX20	83	NKX20-Z	90	20	30	35.1	36.2	30	10	10.5	20	0.3	16.4	23.8	14.3	24.7	3.1	0.91	7500	30.7	0.3
NKX25	125	NKX25-Z	132	25	37	42.1	43.2	30	11	9.5	25	0.6	18.8	30.5	19.6	37.5	4	1.39	6000	37.7	0.6
NKX30	141	NKX30-Z	148	30	42	47.1	48.2	30	11	9.5	30	0.6	22.6	36	20.4	42	0.65	1.56	5000	42.7	0.6
NKX35	163	NKX35-Z	168	35	47	52.1	53.2	30	12	9	35	0.6	24.3	41.5	21.2	47	5.4	1.74	4600	47.7	0.6
NKX40	200	NKX40-Z	208	40	52	60.1	61.2	32	13	10	40	0.6	26	47	27	63	6.2	2.33	4000	55.7	0.6
NKX45	252	NKX45-Z	265	45	58	65.2	66.5	32	14	9	45	0.6	27.5	53	28	69	6.9	2.55	3600	60.5	0.6
NKX50	280	NKX50-Z	300	50	62	70.2	71.5	35	14	10	50	0.6	38	74	29	75	9.5	2.8	3300	65.5	0.6
NKX60	360	NKX60-Z	380	60	72	85.2	86.5	40	17	12	60	1	42	90	41.5	113	11.5	4.2	2800	80.5	1
NKX70	500	NKX70-Z	520	70	85	95.2	96.5	40	18	11	70	1	44.5	92	43	127	11.4	4.7	2400	90.5	1