


POS-EC(L) FINE THREAD SERIES STEEL/PTFE LINED MAINTENANCE FREE MALE ROD ENDS

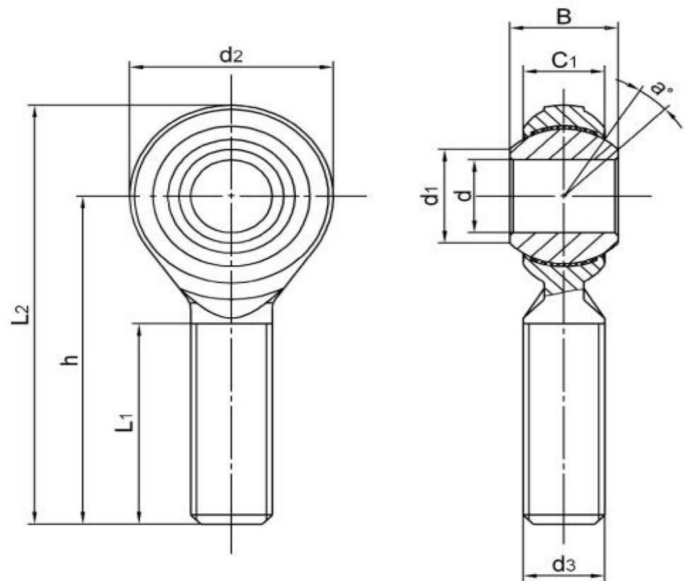

Bearing Reference	Dimensions(mm)									Ball dia	α mis. angle	Load ratings (KN)		Weight (Kg)
	d H7	B	C1	d1	d2	d3-6g	h	L1	L2			Dynamic	Static	
POS8ECX1.0 / POS8ECLX1.0	8	12	9	10.3	22	M8	42	25	53	15.87	14	7.7	12.3	0.032
POS10ECX1.25 / POS10ECLX1.25	10	14	10.5	12.9	26	M10	48	29	61	19.05	13	10.4	17.3	0.054
POS12ECX1.25 / POS12ECLX1.25	12	16	12	15.4	30	M12	54	33	69	22.22	13	13.5	22.7	0.085
POS14ECX1.5 / POS14ECLX1.5	14	19	13.5	16.8	34	M14	60	36	77	25.4	16	17.2	28.2	0.126
POS16ECX1.5 / POS16ECLX1.5	16	21	15	19.3	38	M16	66	40	85	28.58	15	21	35.1	0.185

RIGHT HAND THREADS - REFERENCES WITH 'L' IN THEM ARE WITH LEFT HAND THREADS

Ball: Gcr15 heat treated steel, HRC58-64, Precision ground and polished

Body: Carbon Steel, Zinc plated, Chromate treated.

Race: PTFE composite

Sliding contact surfaces: Steel/PTFE composite

**MIDLAND
BEARINGS**

Midland Bearings Ltd, Unit 33, Second Avenue, Pensnett Trading Estate, Kingswinford, West Midlands, DY6 7UG England
Tel : (0)1384-841400 Fax: (0)1384-841450 sales@midlandbearings.com