



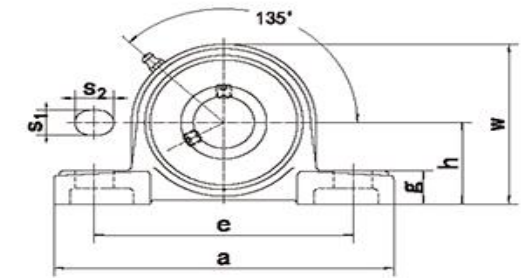

PPL200SSN

THERMOPLASTIC PILLOW BLOCK UNITS



Part Number	Dimensions (mm / in.)											Max.Torque		Bearing Insert	Housing	Weight (kg)
	d	h	a	e	b	s1	s2	g	w	B	n	Bolt D	Nm			
PPL201SSN	12	33.3	127.0	95.0	38.0	11.0	14.0	14.2	65.5	31.0	12.7	M10	18	SS-UC201	PPL204	0.29
PPL201-8SSN	1/2"	1-5/16	5	3-3/4	1-1/2	7/16	9/16	9/16	2-9/16	1.221	0.500	3/8	18	SS-UC201-8	PPL204	0.70
PPL202SSN	15	33.3	127.0	95.0	38.0	11.0	14.0	14.2	65.5	31.0	12.7	M10	18	SS-UC202	PPL204	0.29
PPL203SSN	17	33.3	127.0	95.0	38.0	11.0	14.0	14.2	65.5	31.0	12.7	M10	18	SS-UC203	PPL204	0.29
PPL204SSN	20	33.3	127.0	95.0	38.0	11.0	14.0	14.2	65.5	31.0	12.7	M10	18	SS-UC204	PPL204	0.29
PPL204-12SSN	3/4"	1-5/16	5	3-3/4	1-1/2	7/16	9/16	9/16	2-9/16	1.221	0.500	3/8	18	SS-UC204-12	PPL204	0.70
PPL205SSN	25	36.5	140.5	105.0	38.0	11.0	14.0	14.5	71.0	34.0	14.3	M10	25	SS-UC205	PPL205	0.34
PPL205-16SSN	1"	1-7/16	5-17/32	4-1/8	1-1/2	7/16	9/16	19/32	2-25/32	1.343	0.563	3/8	25	SS-UC205-16	PPL205	0.86
PPL206SSN	30	42.9	163.0	119.0	46.0	14.0	18.0	17.8	84.0	38.1	15.9	M10	30	SS-UC206	PPL206	0.54
PPL206-20SSN	1-1/4"	1-11/16	6-27/64	4-11/16	1-13/16	9/16	45/64	45/64	3-5/16	1.500	0.626	3/8	30	SS-UC206-20	PPL206	1.32
PPL207SSN	35	47.6	168.0	127.0	48.0	14.0	18.0	18.0	94.5	42.9	17.5	M12	35	SS-UC207	PPL207	0.78
PPL207-20SSN	1-1/4"	1-7/8	6-39/64	5	1-7/8	9/16	45/64	45/64	3-23/32	1.689	0.689	7/16	35	SS-UC207-20	PPL207	1.67
PPL208SSN	40	49.2	184.0	137.0	54.0	14.0	18.0	19.5	99.0	49.2	19.0	M12	40	SS-UC208	PPL208	0.97
PPL208-24SSN	1-1/2"	1-15/16	7-1/4	5-13/32	2-1/8	9/16	45/64	49/64	3-57/64	1.937	0.748	7/16	40	SS-UC208-24	PPL208	2.04
PPL209SSN	45	54.0	192.0	146.0	54.0	17.0	20.0	23.0	106.0	49.2	19.0	M16	45	SS-UC209	PPL209	1.09
PPL210SSN	50	57.2	206.0	159.0	60.0	17.0	20.0	23.0	114.0	51.6	19.0	M16	50	SS-UC210	PPL210	1.20
PPL210-32SSN	2"	2-1/4	8-1/8	6-1/4	2-3/8	43/64	25/32	29/32	4-31/64	2.032	0.748	5/8	50	SS-UC210-32	PPL210	2.95
PPL211SSN	55	63.5	219.0	171.0	60.0	20.0	23.0	23.0	125.0	55.6	22.2	M16	55	SS-UC211	PPL211	1.38
PPL211-32SSN	2"	2-1/2	8-5/8	6-47/64	2-3/8	25/32	29/32	29/32	4-59/64	2.189	0.874	5/8	55	SS-UC211-32	PPL211	3.80
PPL212SSN	60	69.8	241.0	184.0	70.0	20.0	23.0	25.0	138.0	65.1	25.4	M16	60	SS-UC212	PPL212	1.52

Thermoplastic Housings are made in a High-grade glass-filled thermoplastic polyester, which has a high tensile strength and can operate in temperatures to 102°C

Colours: Sizes up to 40mm (1.1/2") are available in Black, Blue, Green and White, while sizes over 40mm (1.1/2") are only available in Black or Green

**End Caps matching the colours stated above are available to order, open design caps are only available in Green or White up to 40mm*

Other bearing inserts designs will also fit in these housings, see for example: SS-SA204 to SS-SA212 / SS-SB204 to SS-SB212 / SS-UCX05 TO SS-UCX11