



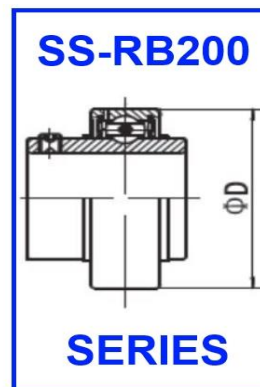

SS-RB200

Stainless Steel Inserts - Parallel Outer



Part Number	Dimensions									Dynamic Load Ratings (N)	Static Load Ratings (N)	Weight (kg)
	d	D	B	C	S	S1	G	ds	F			
SS-RB201	12	47	31	17	12.7	18.3	4.8	M6x1	3.7	10240	5280	0.20
SS-RB201-8	1/2"	47	31	17	12.7	18.3	4.8	1/4-2UNF	3.7	10240	5280	0.19
SS-RB202	15	47	31	17	12.7	18.3	4.8	M6x1	3.7	10240	5280	0.19
SS-RB202-16	16	47	31	17	12.7	18.3	4.8	M6x1	3.7	10240	5280	0.19
SS-RB203	17	47	31	17	12.7	18.3	4.8	M6x1	3.7	10240	5280	0.18
SS-RB204	20	47	31	17	12.7	18.3	4.8	M6x1	3.7	10240	5280	0.16
SS-RB204-12	3/4"	47	31	17	12.7	18.3	4.8	1/4-28UNF	3.7	10240	5280	0.16
SS-RB205	25	52	34.1	17	14.3	19.8	5.0	M6x1	3.9	11200	6280	0.19
SS-RB205-16	1"	52	34.1	17	14.3	19.8	5.0	1/4-28UNF	3.9	11200	6280	0.19
SS-RB206	30	62	38.1	19.0	15.9	22.2	5.0	M6x1	5.0	15560	9000	0.30
SS-RB206-20	1-1/4"	62	38.1	19.0	15.9	22.2	5.0	1/4-2UNF	5.0	15560	9000	0.29
SS-RB207	35	72	42.9	20.0	17.5	25.4	7.0	M8x1	5.7	20560	12160	0.45
SS-RB207-20	1-1/4"	72	42.9	20.0	17.5	25.4	7.0	1/4-2UNF	5.7	20560	12160	0.51
SS-RB208	40	80	49.2	21.0	19.0	30.2	8.0	M8x1	6.2	23600	14480	0.60
SS-RB208-24	1-1/2"	80	49.2	21.0	19.0	30.2	8.0	5/16-24UNF	6.2	23600	14480	0.64
SS-RB209	45	85	49.2	22.0	19.0	30.2	8.0	M8x1	6.4	26160	16720	0.65
SS-RB210	50	90	51.6	24.0	19.0	32.6	10.0	M10x1	6.5	28000	18560	0.75
SS-RB210-32	2"	90	51.6	24.0	19.0	32.6	10.0	3/8-24UNF	6.5	28000	18560	0.73
SS-RB211	55	100	55.6	25.0	22.2	33.4	10.0	M10x1	7.0	34640	23360	0.99
SS-RB211-32	2"	100	55.6	25.0	22.2	33.4	10.0	3/8-2UNF	7.0	34640	23360	1.14
SS-RB212	60	110	65.1	27.0	25.4	39.7	10.0	M10x1	7.6	38160	26240	1.32
SS-RB213	65	120	65.1	28.0	25.4	39.7	10.0	M10x1	8.5	45760	32000	1.70

Standard Insert Bearings: SS-RB200 : AISI420C (S42000/S1420C)

Sealing arrangement each side: NBR Rubber Seal, Covering a Stainless Steel Dust Shield

Grease: Mobil FM222 -30C to +150C (FDA 21 CFR 178.3570 Approved for Food Processing Equipment)