




SS-SB200

Stainless Steel Inserts - Flat Back with Grub Screw Locking

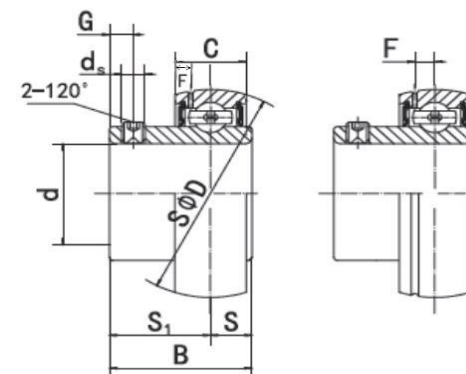

Part Number	Dimensions									Dynamic Load Ratings (N)	Static Load Ratings (N)	Weight (kg)
	d	D	B	S1	C	S	ds	G	F			
SS-SB201	12	40	22.0	16.0	12	6.0	M5x0.8	4.5	3.4	7680	3680	0.10
SS-SB201-8	1/2"	40	22.0	16.0	12	6.0	10-32UNF	4.5	3.4	7680	3680	0.10
SS-SB202	15	40	22.0	16.0	12	6.0	M5x0.8	4.5	3.4	7680	3680	0.10
SS-SB202-16	16	40	22.0	16.0	12	6.0	M5x0.8	4.5	3.4	7680	3680	0.10
SS-SB203	17	40	22.0	16.0	12	6.0	M5x0.8	4.5	3.4	7680	3680	0.09
SS-SB204	20	47	25.0	18.0	14	7.0	M6x1	4.5	4.2	10240	5280	0.13
SS-SB204-12	3/4"	47	25.0	18.0	14	7.0	1/4-28UNF	4.5	4.2	10240	5280	0.14
SS-SB205	25	52	27.0	19.5	15	7.5	M6x1	5.5	4.3	11200	6280	0.16
SS-SB205-16	1"	52	27.0	19.5	15	7.5	1/4-28UNF	5.5	4.3	11200	6280	0.16
SS-SB206	30	62	30.0	22.0	16	8.0	M6x1	6.0	5.0	15560	9000	0.25
SS-SB207	35	72	32.0	23.5	17	8.5	M8x1	6.5	5.6	20560	12160	0.36
SS-SB207-20	1-1/4"	72	32.0	23.5	17	8.5	5/16-24UNF	6.5	5.6	20560	12160	0.41
SS-SB208	40	80	34.0	25.0	18	9.0	M8x1	7.0	5.9	23600	14480	0.45
SS-SB208-24	1-1/2"	80	34.0	25.0	18	9.0	5/16-24UNF	7.0	5.9	23600	14480	0.43

Standard Insert Bearings: SS-SB200 : AISI420C (S42000/S1420C)

Sealing arrangement each side: NBR Rubber Seal, Covering a Stainless Steel Dust Shield

Grease: Mobil FM222 -30C to +150C (FDA 21 CFR 178.3570 Approved for Food Processing Equipment)

Kept in 2 types: Type 1 is with an oil hole and Type 2 is with an oil hole plus groove - If this is important, please check with us before ordering