




SS-SA200(G)

**Stainless Steel Inserts - Flat Back with a
Eccentric Locking Collar**

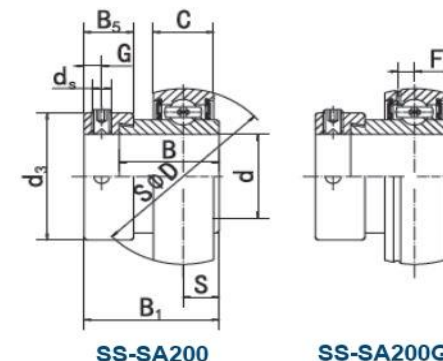

Part Number	Dimensions											Dynamic Load Ratings (N)	Static Load Ratings (N)	Weight (kg)
	d	D	B	B1	C	S	ds	G	F	B5	d3			
SS-SA201	12	40	28.6	19.1	12	6.5	M6x1	4.8	3.4	13.5	28.6	7680	3680	0.12
SS-SA201-8	1/2"	40	28.6	19.1	12	6.5	1/4-28UNF	4.8	3.4	13.5	28.6	7680	3680	0.12
SS-SA202	15	40	28.6	19.1	12	6.5	M6x1	4.8	3.4	13.5	28.6	7680	3680	0.10
SS-SA202-16	16	40	28.6	19.1	12	6.5	M6x1	4.8	3.4	13.5	28.6	7680	3680	0.09
SS-SA203	17	40	28.6	19.1	12	6.5	M6x1	4.8	3.4	13.5	28.6	7680	3680	0.09
SS-SA204	20	47	31.0	21.5	14	7.5	M6x1	4.8	4.2	13.5	33.3	10240	5280	0.16
SS-SA204-12	3/4"	47	31.0	21.5	14	7.5	1/4-28UNF	4.8	4.2	13.5	33.3	10240	5280	0.16
SS-SA205	25	52	31.0	21.5	15	7.5	M6x1	4.8	4.3	13.5	38.1	11200	6280	0.20
SS-SA205-16	1"	52	31.0	21.5	15	7.5	1/4-28UNF	4.8	4.3	13.5	38.1	11200	6280	0.20
SS-SA206	30	62	35.7	23.8	16	9.0	M8x1	6.0	5.0	15.9	44.5	15560	9000	0.30
SS-SA206-20	1-1/4"	62	35.7	23.8	16	9.0	5/16-24UNF	6.0	5.0	15.9	44.5	15560	9000	0.29
SS-SA207	35	72	38.9	25.4	17	9.5	M8x1	6.8	5.6	17.5	55.6	20560	12160	0.42
SS-SA208	40	80	43.7	30.2	18	11.0	M8x1	6.8	5.9	18.3	60.3	23600	14480	0.60
SS-SA208-24	1-1/2"	80	43.7	30.2	18	11.0	5/16-24UNF	6.8	5.9	18.3	60.3	23600	14480	0.58
SS-SA209	45	85	43.7	30.2	19	11.0	M8x1	6.8	6.1	18.3	63.5	26160	16720	0.64
SS-SA210	50	90	43.7	30.2	20	11.0	M8x1	6.8	6.5	18.3	69.9	28000	18560	0.72
SS-SA211	55	100	48.4	32.5	21	12.0	M10x1	8	7.0	20.7	76.2	34800	23360	1.00
SS-SA211-32	2"	100	48.4	32.5	21	12.0	3/8-24UNF	8	7.30	20.7	76.2	34800	23360	1.00
SS-SA212	60	110	53.1	37.2	22	13.5	M10x1	8	7.4	22.3	84.2	38160	26320	1.34

Standard Insert Bearings: SS-SA200 : AISI420C (S42000/S1420C)

Sealing arrangement each side: NBR Rubber Seal, Covering a Stainless Steel Dust Shield

Grease: Mobil FM222 -30C to +150C (FDA 21 CFR 178.3570 Approved for Food Processing Equipment)

Please specify and add Suffix G if you require a groove on the outer ring of the insert