




SS-UCX--

Stainless Steel Inserts - Heavy Duty Series

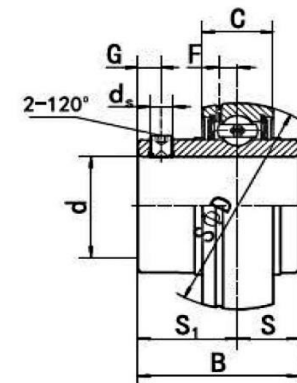

Part Number	Dimensions									Dynamic Load Ratings (N)	Static Load Ratings (N)	Weight (kg)
	d	D	B	C	S	S1	G	ds	F			
SS-UCX05	25	62	38.1	19	15.9	22.2	5	M6x1	5.0	15560	9000	0.36
SS-UCX05-16	1"	62	38.1	19	15.9	22.2	5.0	1/4-28UNF	5.0	15560	9000	0.36
SS-UCX06	30	72	42.9	20	17.5	25.4	7	M8x1	5.7	20560	12160	0.53
SS-UCX07	35	80	49.2	21	19	30.2	8	M8x1	6.2	23600	14480	0.70
SS-UCX08	40	85	49.2	22	19	30.2	8	M8x1	6.4	26160	16720	0.77
SS-UCX08-24	1-1/2"	85	49.2	22	19	30.2	8	5/16-24UNF	6.4	26160	16720	0.77
SS-UCX09	45	90	51.6	24	19	32.6	10	M8x1	6.4	28000	18560	0.88
SS-UCX10	50	100	55.6	25	22.2	33.4	10	M10x1	6.5	34640	23360	1.15
SS-UCX11	55	110	65.1	27	25.4	39.7	10	M10x1	7.0	38160	26240	1.55

Standard Insert Bearings: SS-UC200 : AISI420C (S42000/S1420C)

Sealing arrangement each side: NBR Rubber Seal, Covering a Stainless Steel Dust Shield

Grease: Mobil FM222 -30C to +150C (FDA 21 CFR 178.3570 Approved for Food Processing Equipment)