





STAINLESS STEEL RADIAL BALL BEARINGS SS61800 SERIES



Part Number	Bore Diameter mm	Outer Diameter mm	Width mm	Dynamic Load Rating C (N)	Static Load Rating C0 (N)	Limiting Speed Grease r/min	Weight kg
SS61800	10	19	5	1000	600	32000	0.005
SS61800-ZZ	10	19	5	1000	600	32000	0.005
SS61800-2RS	10	19	5	1000	600	20000	0.005
SS61801	12	21	5	1100	700	29000	0.006
SS61801-ZZ	12	21	5	1100	700	29000	0.006
SS61801-2RS	12	21	5	1100	700	19000	0.006
SS61802	15	24	5	1200	800	26000	0.007
SS61802-ZZ	15	24	5	1200	800	26000	0.007
SS61802-2RS	15	24	5	1200	800	17000	0.007
SS61803	17	26	5	1300	900	24000	0.008
SS61803-ZZ	17	26	5	1300	900	24000	0.008
SS61803-2RS	17	26	5	1300	900	16000	0.008
SS61804	20	32	7	2000	1500	21000	0.018
SS61804-ZZ	20	32	7	2000	1500	21000	0.018
SS61804-2RS	20	32	7	2000	1500	13000	0.018
SS61805	25	37	7	3300	2500	18000	0.022
SS61805-ZZ	25	37	7	3300	2500	18000	0.022
SS61805-2RS	25	37	7	3300	2500	11000	0.022
SS61806	30	42	7	3400	2800	15000	0.027
SS61806-ZZ	30	42	7	3400	2800	15000	0.027
SS61806-2RS	30	42	7	3400	2800	9500	0.027
SS61807	35	47	7	3600	3100	13000	0.030
SS61807-ZZ	35	47	7	3600	3100	13000	0.030
SS61807-2RS	35	47	7	3600	3100	8000	0.030

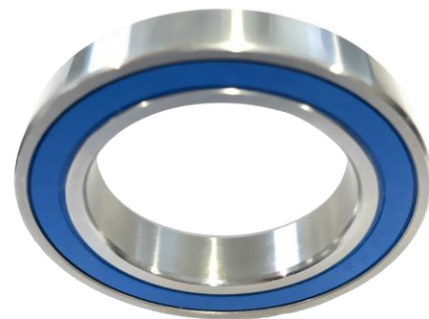

STAINLESS STEEL RADIAL BALL BEARINGS SS61800 SERIES

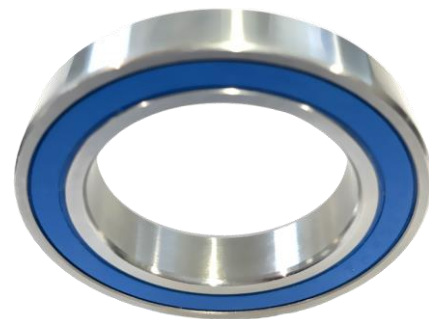

Part Number	Bore Diameter mm	Outer Diameter mm	Width mm	Dynamic Load Rating C (N)	Static Load Rating C0 (N)	Limiting Speed Grease r/min	Weight kg
SS61808-ZZ	40	52	7	3700	3400	12000	0.034
SS61808-2RS	40	52	7	3700	3400	7500	0.034
SS61809	45	58	7	4500	4200	11000	0.040
SS61809-ZZ	45	58	7	4500	4200	11000	0.040
SS61809-2RS	45	58	7	4500	4200	6700	0.040
SS61810	50	65	7	4700	4700	9600	0.052
SS61810-ZZ	50	65	7	4700	4700	9600	0.052
SS61810-2RS	50	65	7	4700	4700	6000	0.052
SS61811-2RS	55	72	9	6200	6100	5300	0.083
SS61812-2RS	60	78	10	6500	6600	4800	0.110
SS61813-2RS	65	85	10	9000	11300	4500	0.130
SS61814-2RS	70	90	10	9100	11700	4300	0.140
SS61815-2RS	75	95	10	9400	10600	4000	0.150
SS61816-2RS	80	100	10	10000	12200	3600	0.155
SS61817-2RS	85	110	13	14600	16300	3400	0.270
SS61818-2RS	90	115	13	14900	16700	3200	0.280
SS61819-2RS	95	120	13	14900	17200	3000	0.300
SS61820-2RS	100	125	13	14900	17900	3000	0.310
SS61821-2RS	105	130	13	15600	19200	2800	0.320
SS61822-2RS	110	140	16	21100	30100	2600	0.600
SS61824-2RS	120	150	16	21800	32300	2400	0.650