




# TAPR-U Series Female Hydraulic Rod Ends (Threaded)

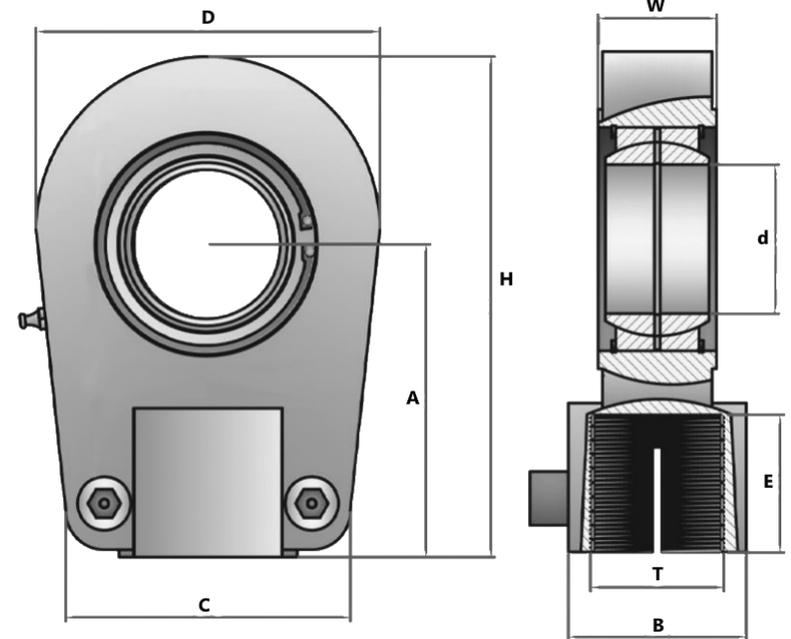

PART NUMBER	d	D	H	W	A	B	C	T	E	Dynamic Load (kN)	Static Load (kN)	Swing- ing Angle °	Screw Torque (Nm)	Weight (kg)
TAPR20U	20	56	80	19	50	25	46	M16x1.5	17	30	81	9	25	0.440
TAPR25U	25	56	80	23	50	25	46	M16x1.5	17	48	71	7	25	0.490
TAPR30U	30	64	94	28	60	32	50	M22x1.5	23	62	106	6	25	0.700
TAPR35U	35	78	112	30	70	40	66	M28x1.5	29	80	153	6	49	1.201
TAPR40U	40	94	135	35	85	49	76	M35x1.5	36	100	250	7	49	3.750
TAPR50U	50	116	168	40	105	61	90	M45x1.5	46	156	365	6	86	3.800
TAPR60U	60	130	200	50	130	75	120	M58x1.5	59	245	400	6	210	5.621
TAPR70U	70	154	232	55	150	86	130	M65x1.5	66	315	540	6	210	8.810
TAPR80U	80	176	265	60	170	105	160	M80x2	81	400	670	6	410	14.600

**The TAPR-U series contain the greaseable Steel/Steel GE-ES series of plain spherical bearings and are housed in Nodular Cast Iron. They are fitted with a grease nipple and have a threaded housing, split at the base and have allen key adjustable bolts which enable you to be able to clamp them onto the threaded shaft.**