


UK2(Normal duty)

Insert bearing

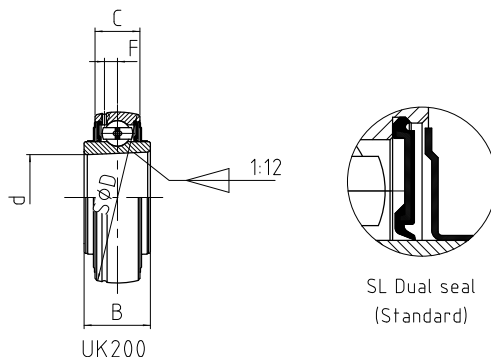

UK200

SL Dual seal
(Standard)

Bearing NO.	Dimensions (mm / in.)									Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
	d1	d	D	B	C	B1	B2	d2	F			
UK205;H2305	20	25	52	23	17	35	8	38	4.3	14000	7850	0.24
205;HE2305	3/4	0.9843	2.0472	0.9055	0.6693	1.3780	0.3150	1.4961	0.1693			
UK206;H2306	25	30	62	26	19	38	8	45	5.2	19450	11250	0.36
206;HS2306	1	1.1811	2.4409	1.0236	0.7480	1.4961	0.3150	1.7717	0.2047			
206;HE2306												
UK207;H2307	30	35	72	29	20	43	9	52	5.7	25700	15200	0.52
207;HS2307	1-1/8	1.3780	2.8346	1.1417	0.7874	1.6929	0.3543	2.0472	0.2244			
UK208;H2308	35	40	80	31	21	46	10	58	6.2	29500	18100	0.67
208;HE2308	1-1/4	1.5748	3.1496	1.2205	0.8268	1.8110	0.3937	2.2835	0.2441			
208;HS2308	1-3/8											
UK209;H2309	40	45	85	31	22	50	11	65	6.6	32700	20900	0.77
209;HA2309	1-7/16	1.7717	3.3465	1.2205	0.8661	1.9685	0.4331	2.5591	0.2598			
209;HE2309	1-1/2											
209;HS2309	1-5/8											
UK210;H2310	45	50	90	32	24	55	12	70	6.5	35000	23200	0.92
210;HS2310	1-5/8	1.9685	3.5433	1.2598	0.9449	2.1654	0.4724	2.7559	0.2559			
210;HA2310	1-11/16											
210;HE2310	1-3/4											
UK211;H2311	50	55	100	35	25	59	12	75	7.1	43300	29200	1.15
211;HS2311	1-7/8	2.1654	3.9370	1.3780	0.9843	2.3228	0.4724	2.9528	0.2795			
211;HA2311	1-15/16											
211;HE2311	2											
UK212;H2312	55	60	110	38	27	62	13	80	7.9	47700	32800	1.47
212;HS2312	2-1/8	2.3622	4.3307	1.4961	1.0630	2.4409	0.5118	3.1496	0.3110			
UK213;H2313	60	65	120	40	28	65	14	85	8.0	57200	40000	1.81
213;HA2313	2-3/16	2.5591	4.7244	1.5748	1.1024	2.5591	0.5512	3.3465	0.3150			
213;HE2313	2-1/4											
213;HS2313	2-3/8											
UK215;H2315	65	75	130	44	30	73	15	98	8.6	66200	49300	2.55
215;HA2315	2-7/16	2.9528	5.1181	1.7323	1.1811	2.8740	0.5906	3.8583	0.3386			
215;HE2315	2-1/2											
UK216;H2316	70	80	140	45	32	78	17	105	9.0	72600	53300	3.08
216;HA2316	2-11/16	3.1496	5.5118	1.7717	1.2598	3.0709	0.6693	4.1339	0.3543			
216;HE2316	2-3/4											
UK217;H2317	75	85	150	46	34	82	18	110	9.8	83300	63700	3.70
217;HA2317	2-15/16	3.3465	5.9055	1.8110	1.3386	3.2283	0.7087	4.3307	0.3858			
217;HE2317	3											
UK218;H2318	80	90	160	47	36	86	18	120	10.8	96000	71100	4.34
218;HA2318	3-3/16	3.5433	6.2992	1.8504	1.4173	3.3858	0.7087	4.7244	0.4252			

For bearing inserts with a tapered bore, adaptor sleeves should be ordered separately