


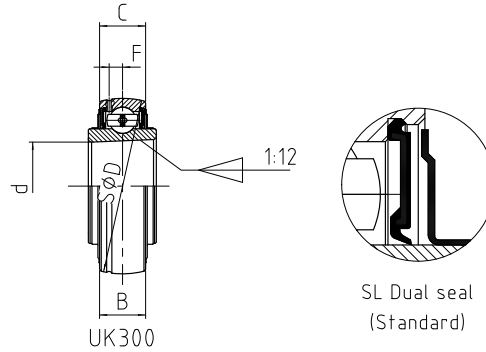

Insert bearing

Bearing NO.	Dimensions (mm / in.)									Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
	d1	d	D	B	C	B1	B2	d2	F			
UK305;H2305	20	25	62	26	20	35	8	38	5.4	22400	11500	0.36
305;HE2305	3/4	0.9843	2.4409	1.0236	0.7874	1.3780	0.3150	1.4961	0.2126			
UK306;H2306	25	30	72	29	23	38	8	45	6.0	26500	14900	0.56
306;HS2306	7/8	1.1811	2.8346	1.1417	0.9055	1.4961	0.3150	1.7717	0.2362			
306;HE2306	1											
UK307;H2307	30	35	80	33	25	43	9	52	6.8	33300	19100	0.72
307;HS2307	1-1/8	1.3780	3.1496	1.2992	0.9843	1.6929	0.3543	2.0472	0.2677			
UK308;H2308	35	40	90	34	27	46	10	58	7.4	40600	23700	0.99
308;HE2308	1-1/4	1.5748	3.5433	1.3386	1.0630	1.8110	0.3937	2.2835	0.2913			
308;HS2308	1-3/8											
UK309;H2309	40	45	100	37	30	50	11	65	8.4	48600	28900	1.29
309;HA2309	1-7/16	1.7717	3.9370	1.4567	1.1811	1.9685	0.4331	2.5591	0.3307			
309;HE2309	1/12											
309;HS2309	1-5/8											
UK310;H2310	45	50	110	41	32	55	12	70	9.2	62000	38000	1.71
310;HS2310	1-5/8	1.9685	4.3307	1.6142	1.2598	2.1654	0.4724	2.7559	0.3622			
310;HA2310	1-11/16											
310;HE2310	1-3/4											
UK311;H2311	50	55	120	44	34	59	12	75	9.9	71600	44600	2.08
311;HS2311	1-7/8	2.1654	4.7244	1.7323	1.3386	2.3228	0.4724	2.9528	0.3898			
311;HA2311	1-15/16											
311;HE2311	2											
UK312;H2312	55	60	130	47	36	62	13	80	10.5	81600	51800	2.88
312;HS2312	2-1/8	2.3622	5.1181	1.8504	1.4173	2.4409	0.5118	3.1496	0.4134			
UK313;H2313	60	65	140	49	38	65	14	85	11.5	93700	60400	3.10
313;HA2313	2-3/16	2.5591	5.5118	1.9291	1.4961	2.5591	0.5512	3.3465	0.4528			
313;HE2313	2-1/4											
313;HS2313	2-3/8											
UK315;H2315	65	75	160	55	42	73	15	98	12.8	112800	75700	4.76
315;HA2315	2-7/16	2.9528	6.2992	2.1654	1.6535	2.8740	0.5906	3.8583	0.5039			
315;HE2315	2-1/2											
UK316;H2316	70	80	170	55	44	78	17	105	13.7	123500	88200	5.51
316;HA2316	2-11/16	3.1496	6.6929	2.1654	1.7323	3.0709	0.6693	4.1339	0.5394			
316;HE2316	2-3/4											
UK317;H2317	75	85	180	60	46	82	18	110	14.3	133000	97500	6.75
317;HA2317	2-15/16	3.3465	7.0866	2.3622	1.8110	3.2283	0.7087	4.3307	0.5630			
317;HE2317	3											
UK318;H2318	80	90	190	63	48	86	18	120	15.0	144700	110600	7.62
318;HA2318	3-3/16	3.5433	7.4803	2.4803	1.8898	3.3858	0.7087	4.7244	0.5906			
UK319;H2319	85	95	200	66	50	90	19	125	15.9	155600	122000	9.23
319;HA2319	3-5/16	3.7402	7.8740	2.5984	1.9685	3.5433	0.7480	4.9213	0.6260			
UK320;H2320	90	100	215	68	54	97	20	130	16.9	173000	141000	10.85
320;HA2320	3-7/16	3.9370	8.4646	2.6772	2.1260	3.8189	0.7874	5.1181	0.6654			
UK322;H2322	100	110	240	78	60	105	21	145	19.2	205000	179000	14.94
322;HA2322	3-15/16	4.3307	9.4488	3.0709	2.3622	4.1339	0.8268	5.7087	0.7559			
UK324;H2324	110	120	260	87	64	112	22	155	20.5	227000	207000	19.29
324;HA2324	4-3/16	4.7244	10.2362	3.4252	2.5197	4.4094	0.8661	6.1024	0.8071			
UK326;H2326	115	130	280	87	68	121	23	165	22.0	253000	241000	23.40
326;HA2326	4-7/16	5.1181	11.0236	3.4252	2.6772	4.7638	0.9055	6.4961	0.8661			
UK328;H2328	125	140	300	97	72	131	24	180	23.2	274000	272000	29.45
328;HA2328	4-15/16	5.5118	11.8110	3.8189	2.8346	5.1575	0.9449	7.0866	0.9134			

For bearing inserts with a tapered bore, adaptor sleeves should be ordered separately