
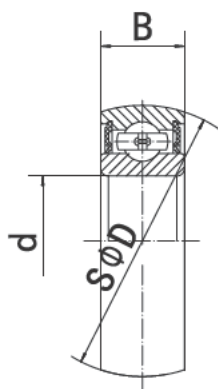



Ball Bearings
CS2(Light-duty)
CS3(Heavy-duty)

 J type seal
(Standard)

 H type seal
(Optional)

Bearing NO.	Dimensions (mm / in.)			Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
	d	D	B			
CS200	10 0.3937	30 1.1811	9 0.3543	5100	2230	0.031
CS201	12 0.4724	32 1.2598	10 0.3937	6800	3050	0.033
CS202	15 0.5906	35.0 1.3780	11 0.4331	7600	3490	0.043
CS203	17 0.6693	40 1.5748	12 0.4724	9600	4600	0.061
CS204	20 0.7874	47 1.8504	14 0.5512	12800	6600	0.098
CS205	25 0.9843	52 2.0472	15 0.5906	1400	7850	0.122
CS206	30 1.1811	62 2.4409	16 0.6299	19400	11250	0.195
CS207	35 1.3780	72 2.8346	17 0.6693	25700	15300	0.280
CS208	40 1.5748	80 3.1496	18 0.7087	29500	18100	0.358
CS209	45 1.7717	85 3.3465	19 0.7480	32700	20900	0.405
CS210	50 1.9685	90 3.5433	20 0.7874	3500	23200	0.449
CS211	55 2.1654	100 3.9370	21 0.8268	43300	29200	0.589
CS212	60 2.3622	110 4.3307	22 0.8661	47700	32800	0.774
CS302	15 0.5906	42 1.6535	13 0.5118	11440	5430	0.076
CS303	17 0.6693	47 1.8504	14 0.5512	13585	6560	0.105
CS304	20 0.7874	52 2.0472	15 0.5906	15938	7810	0.137
CS305	25 0.9843	62 2.4409	17 0.6693	22400	11500	0.211
CS306	30 1.1811	72 2.8346	19 0.7480	26500	14900	0.338
CS307	35 1.3780	80 3.1496	21 0.8268	33300	19100	0.439
CS308	40 1.5748	90 3.5433	23 0.9055	40600	23700	0.618
CS309	45 1.7717	100 3.9370	25 0.9843	48600	28900	0.810
CS310	50 1.9685	110 4.3307	27 1.0630	6200	3800	1.048
CS311	55 2.1654	120 4.7244	29 1.1417	71600	44600	1.326
CS312	60 2.3622	130 5.1181	31 1.2205	81600	51800	1.659