




SAPF2
(SA2-Fitted)

Pressed Housing Flange Units
(Light duty)

SBPF2
(SB2-Fitted)

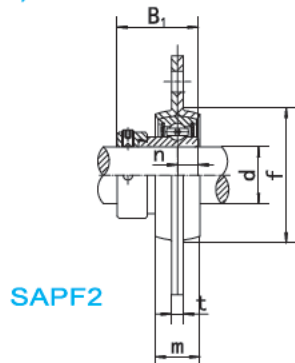

SAPF2

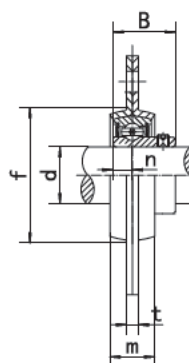

SBPF2

Unit NO.	Dimensions (mm / in.)									Bolt Size mm/in.	Bearing No.	Housing No.	Weight (kg)
	d	a	e	m	s ¹⁾	t	f	B ₁	n				
SAPF 201 201-8	12 1/2	81	63.5	14.0	7.1	4.0	49	28.6	6.5	M6	SA201 SA201-8	PF204	0.30
SAPF 202 202-9 202-10	15 9/16 5/8	3-3/16	2-1/2	9/16	9/32	0.157	1-59/64	1.1260	0.2559	1/4	SA202 SA202-9 SA202-10	PF204	
SAPF 203 203-11	17 11/16	3-3/16	2-1/2	9/16	9/32	0.157	1-59/64	1.1260	0.2559	1/4	SA203 SA203-11	PF204	
SAPF 204 204-12	20 3/4	90 3-5/64	71.5 2-13/16	16.0 5/8	9.0 23/64	4.0 0.157	56 2-13/64	31 1.2204	7.5 0.2953	M8 5/16	SA204 SA204-12	PF204	0.33
SAPF 205 205-13 205-14 205-15 205-16	25 13/16 7/8 15/16 1	95 3-3/4	76.0 2-63/64	18.0 23/32	9.0 23/64	4.0 0.157	60 2-23/64	31 1.2204	7.5 0.2953	M8 5/16	SA205 SA205-13 SA205-14 SA205-15 SA205-16	PF205	0.37
SAPF 206 206-17 206-18 206-19 206-20	30 1-1/16 1-1/8 1-3/16 1-1/4	113 4-7/16	90.5 3-9/16	18.0 23/32	11.0 7/16	5.2 0.205	71 2-51/64	35.7 1.4055	9 0.3543	M10 3/8	SA206 SA206-17 SA206-18 SA206-19 SA206-20	PF206	0.60
SAPF 207 207-20 207-21 207-22 207-23	35 1-1/4 1-5/16 1-3/8 1-7/16	122 4-13/16	100.0 3-15/16	20.0 25/32	11.0 7/16	5.2 0.205	81 3-3/16	38.9 1.5315	9.5 0.3740	M10 3/8	SA207 SA207-20 SA207-21 SA207-22 SA207-23	PF207	0.80
SAPF 208 208-24 208-25	40 1-1/2 1-9/16	148 5-13/16	119.0 4-11/16	21.0 13/16	13.5 17/32	6.8 0.268	91 3-37/64	43.7 1.7205	11 0.433	M12 1/2	SA208 SA208-24 SA208-25	PF208	1.30
SAPF 209 209-26 209-27 209-28	45 1-5/8 1-11/16 1-3/4	150 5-29/32	120.5 4-3/4	23.0 29/32	13.5 17/32	6.8 0.268	98 3-55/64	43.7 1.7205	11 0.433	M12 1/2	SA209 SA209-26 SA209-27 SA209-28	PF209	1.31
SAPF 210 210-29 210-30 210-31 210-32	50 1-13/16 1-7/8 1-15/16 2	157 6-3/16	127.0 5	25.0 63/64	13.5 17/32	8.0 0.315	102 4-1/64	43.7 1.7205	11 0.433	M12 1/2	SA210 SA210-29 SA210-30 SA210-31 SA210-32	PF210	1.59
SAPF 211 211-32 211-33 211-34 211-35	55 2 2-1/16 2-1/8 2-3/16	168 6-5/8	138.0 5-7/16	26.0 1-1/64	13.5 17/32	8.0 0.315	113 4-29/64	48.4 1.9055	12 0.472	M12 1/2	SA211 SA211-32 SA211-33 SA211-34 SA211-35	PF211	1.95
SAPF 212 212-36 212-37 212-38 212-39	60 2-1/4 2-5/16 2-3/8 2-7/16	177 6-31/32	148.0 5-53/64	28.0 1-7/64	13.5 17/32	8.0 0.315	122 4-13/16	53.1 2.0906	13.5 0.531	M12 1/2	SA212 SA212-36 SA212-37 SA212-38 SA212-39	PF212	2.41
Unit NO.	Dimensions (mm / in.)									Bolt Size mm/in.	Bearing No.	Housing No.	Weight (kg)
	d	a	e	m	s ¹⁾	t	f	B	n				
SBPF 201 201-8	12 1/2	81	63.5	14.0	7.1	4.0	49	22	6	M6	SB201 SB201-8	PF204	0.27
SBPF 202 202-9 202-10	15 9/16 5/8	3-3/16	2-1/2	9/16	9/32	0.157	1-59/64	0.8661	0.2362	1/4	SB202 SB202-9 SB202-10	PF204	
SBPF 203 203-11	17 11/16	3-3/16	2-1/2	9/16	9/32	0.157	1-59/64	0.8661	0.2362	1/4	SB203 SB203-11	PF203	
SBPF 204 204-12	20 3/4	90 3-5/64	71.5 2-13/16	16.0 5/8	9.0 23/64	4.0 0.157	56 2-13/64	25 0.9843	7 0.2756	M8 5/16	SB204 SB204-12	PF204	0.29
SBPF 205 205-13 205-14 205-15 205-16	25 13/16 7/8 15/16 1	95 3-3/4	76.0 2-63/64	18.0 23/32	9.0 23/64	4.0 0.157	60 2-23/64	27 1.0630	7.5 0.2953	M8 5/16	SB205 SB205-13 SB205-14 SB205-15 SB205-16	PF205	0.33
SBPF 206 206-17 206-18 206-19 206-20	30 1-1/16 1-1/8 1-3/16 1-1/4	113 4-7/16	90.5 3-9/16	18.0 23/32	11.0 7/16	5.2 0.205	71 2-51/64	30 1.1811	8 0.3150	M10 3/8	SB206 SB206-17 SB206-18 SB206-19 SB206-20	PF206	0.54
SBPF 207 207-20 207-21 207-22 207-23	35 1-1/4 1-5/16 1-3/8 1-7/16	122 4-13/16	100.0 3-15/16	20.0 25/32	11.0 7/16	5.2 0.205	81 3-3/16	32 1.2598	8.5 0.3346	M10 3/8	SB207 SB207-20 SB207-21 SB207-22 SB207-23	PF207	0.68
SBPF 208 208-24 208-25	40 1-1/2 1-9/16	148 5-13/16	119.0 4-11/16	21.0 13/16	13.5 17/32	6.8 0.268	91 3-37/64	34 1.3386	9 0.3543	M12 1/2	SB208 SB208-24 SB208-25	PF208	1.14
SBPF 209 209-26 209-27 209-28	45 1-5/8 1-11/16 1-3/4	150 5-29/32	120.5 4-3/4	23.0 29/32	13.5 17/32	6.8 0.268	98 3-55/64	41.2 1.6220	10.2 0.402	M12 1/2	SB209 SB209-26 SB209-27 SB209-28	PF209	1.21
SBPF 210 210-29 210-30 210-31 210-32	50 1-13/16 1-7/8 1-15/16 2	157 6-3/16	127.0 5	25.0 63/64	13.5 17/32	8.0 0.315	102 4-1/64	43.5 1.7126	10.9 0.429	M12 1/2	SB210 SB210-29 SB210-30 SB210-31 SB210-32	PF210	1.49
SBPF 211 211-32 211-33 211-34 211-35	55 2 2-1/16 2-1/8 2-3/16	168 6-5/8	138.0 5-7/16	26.0 1-1/64	13.5 17/32	8.0 0.315	113 4-29/64	45.3 1.7835	11.8 0.465	M12 1/2	SB211 SB211-32 SB211-33 SB211-34 SB211-35	PF211	1.76
SBPF 212 212-36 212-37 212-38 212-39	60 2-1/4 2-5/16 2-3/8 2-7/16	177 6-31/32	148.0 5-53/64	28.0 1-7/64	13.5 17/32	8.0 0.315	122 4-13/16	53.7 2.1142	14.9 0.587	M12 1/2	SB212 SB212-36 SB212-37 SB212-38 SB212-39	PF212	2.23

1) Note: PF208-212 With 4 bolt holes