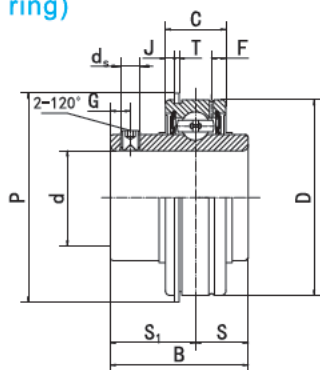


Ball Bearings
(with locating snap ring)

SER2(Normal-duty)

 SL Dual seal
(Standard)

 L₃ Triple-lip seal
(Optional)

 F seal
(Optional)

Bearing NO.	Dimensions (mm / in.)												Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
	d	D	B	C	S	S ₁	T	F	J	P	G	d _s			
SER201 201-8	12 1/2	47 1.8504	31 1.2205	15.9 0.6260	10.3 0.406	20.7 0.815	1.12 0.044	3.8 0.150	2.46 0.097	52.7 2.075	4.8 0.189	M6x1 1/4-28UNF	12800	6600	0.22
SER202 202-10	15 5/8														0.22
SER203	17														0.22
SER204 204-12	20 3/4	47 1.8504	31 1.2205	15.9 0.6260	10.3 0.406	20.7 0.815	1.12 0.044	3.8 0.150	2.46 0.097	52.7 2.075	4.8 0.189	M6x1 1/4-28UNF	12800	6600	0.17
SER205 205-13	25 13/16														0.21
205-14	7/8														
205-15	15/16														
205-16	1	52 2.0472	34.9 1.3740	19 0.7480	13.1 0.516	21.8 0.858	1.12 0.044	5.2 0.205	2.46 0.097	57.9 2.280	5 0.197	M6x1 1/4-28UNF	14000	7850	
SER206 206-17	30 1-1/16	62 2.4409	38.1 1.5000	22.2 0.8740	15.9 0.626	22.2 0.874	1.7 0.067	5.6 0.220	3.28 0.129	67.7 2.665	5 0.197	M6x1 1/4-28UNF	19450	11250	0.33
206-18	1-1/8														
206-19	1-3/16														
206-20	1-1/4														
SER207 207-20	35 1-1/4	72 2.8346	42.9 1.6890	23.8 0.9370	17.5 0.689	25.4 1.000	1.7 0.067	5.6 0.220	3.28 0.129	78.6 3.094	6.7 0.264	M8x1 5/16-24UNF	25700	15200	0.50
207-21	1-5/16														
207-22	1-3/8														
207-23	1-7/16														
SER208 208-24	40 1-1/2	80 3.1496	49.2 1.9370	27.8 1.0945	19 0.748	30.2 1.189	1.7 0.067	6.4 0.252	3.28 0.129	86.6 3.409	8 0.315	M8x1 5/16-24UNF	29500	18100	0.70
208-25	1-9/16														
SER209 209-26	45 1-5/8														
209-27	1-11/16	85 3.3465	49.2 1.9370	27.8 1.0945	19 0.748	30.2 1.189	1.7 0.067	6.4 0.252	3.28 0.129	91.6 3.606	8 0.315	M8x1 5/16-24UNF	32700	20900	0.72
209-28	1-3/4														
SER210 210-29	50 1-13/16														
210-30	1-7/8	90 3.5433	51.6 2.0315	28.6 1.1260	19 0.748	32.6 1.283	2.46 0.097	7.5 0.295	3.28 0.129	96.5 3.799	10 0.394	M10x1 3/8-24UNF	35000	23200	0.83
210-31	1-15/16														
210-32	2														
SER211 211-32	55 2	100 3.9370	55.6 2.1890	30.2 1.1890	22.2 0.874	33.4 1.315	2.46 0.097	7.5 0.295	3.28 0.129	106.5 4.193	10 0.394	M10x1 3/8-24UNF	43300	29200	1.10
211-33	2-1/16														
211-34	2-1/8														
211-35	2-3/16														
SER212 212-36	60 2-1/4	110 4.3307	65.1 2.5630	31.8 1.2520	25.4 1.000	39.7 1.563	2.46 0.097	7.5 0.295	3.28 0.129	116.6 4.591	10 0.394	M10x1 3/8-24UNF	47700	32800	1.53
212-37	2-5/16														
212-38	2-3/8														
212-39	2-7/16														