




FULL COMPLIMENT NEEDLE ROLLER BEARINGS WITH INNER RING

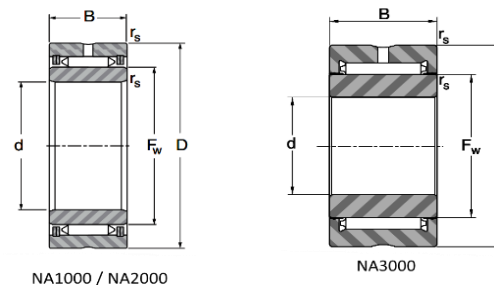

Part Number	Dimensions (mm)					Load Rating (N)		Speed rating (min-1)		Weight (kg)
								Lubrication		
	d	D	b	F _w	r _s (min)	Dynamic C	Static C ₀	Grease	Oil	
NA1012	12	28	15	17.6	0.35	10600	15900	13300	21300	0.050
NA1015	15	32	15	20.8	0.65	11900	18600	11400	17200	0.044
NA2015	15	35	22	22.1	0.65	22400	35800	10500	16500	0.082
NA1020	20	42	18	28.7	0.65	18600	32400	8200	12500	0.084
NA2020	20	42	22	28.7	0.65	27300	47000	8300	1200	0.104
NA1025	25	47	18	33.5	0.65	20700	37500	7000	10600	0.097
NA2025	25	47	22	33.5	0.65	31800	57700	7000	10500	0.122
NA2030	30	52	22	38.2	0.65	33400	63900	6300	9700	0.139
NA2035	35	58	22	44	0.65	36400	71400	5300	8300	0.160
NA3035	35	72	36	44	0.65	86500	176300	4700	7200	0.545
NA1040	40	65	18	49.7	0.85	27200	55300	4700	7300	0.160
NA2040	40	65	22	49.7	0.85	39500	80900	4700	7200	0.200
NA3040	40	80	36	55.4	0.85	65300	135100	4300	6600	0.672
NA1045	45	72	18	55.4	0.85	29000	63000	4300	6600	0.193
NA2045	45	72	22	55.4	0.85	43000	91200	4300	6600	0.242
NA3045	45	85	38	62.1	0.85	101700	21900	3800	5900	0.710
NA1050	50	80	20	62.1	0.85	31700	70100	3800	5900	0.418
NA2050	50	80	28	62.1	0.85	61600	137600	3800	5900	0.603
NA3050	50	90	38	68.8	0.85	109000	247200	3400	5300	1.220
NA2055	55	85	20	68.8	0.85	66700	151600	3500	5300	0.361
NA3055	55	85	28	72.6	0.85	111500	256000	3200	5000	0.782
NA1060	60	95	38	72.6	0.85	35800	81000	3300	5000	0.283
NA2060	60	90	28	72.6	0.85	68600	159500	3300	5000	0.413
NA3060	60	100	38	78.3	0.85	119100	277900	3100	4700	0.810
NA2070	70	100	28	83.1	0.85	80000	190000	2800	4400	0.470