SS-UCF200

Fully Stainless Steel Flanged Housing Units

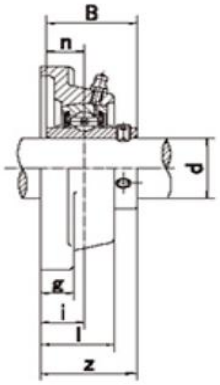



Part Number	Dimensions										For Bolt Size	Bearing Insert	Housing	Weight (kg)
	d	a	e	i	g	l	s	z	B	n				
SS-UCF201	12	86	64	15	12	25.5	12	33.3	31	12.7	M10	SS-UC201	SS-F201	0.59
SS-UCF201-8	1/2	3-3/8	2-33/64	19/32	15/32	1	15/32	1-5/16	1.2205	0.5	3/8	SS-UC201-8	SS-F201	0.58
SS-UCF202	15	86	64	15	12	25.5	12	33.3	31	12.7	M10	SS-UC202	SS-F202	0.58
SS-UCF203	17	86	64	15	12	25.5	12	33.3	31	12.7	M10	SS-UC203	SS-F203	0.57
SS-UCF204	20	86	64	15	12	25.5	12	33.3	31	12.7	M10	SS-UC204	SS-F204	0.55
SS-UCF204-12	3/4	3-3/8	2-33/64	19/32	15/32	1	15/32	1-5/16	1.2205	0.5	3/8	SS-UC204-12	SS-F204	0.55
SS-UCF205	25	95	70	16	14	27	12	35.8	34.1	14.3	M10	SS-UC205	SS-F205	0.73
SS-UCF205-16	1	3-3/4	2-3/4	5/8	35/64	1-1/16	15/32	1-13/32	1.3425	0.563	3/8	SS-UC205-16	SS-F205	0.73
SS-UCF206	30	108	83	18	14	31	12	40.2	38.1	15.9	M10	SS-UC206	SS-F206	1.02
SS-UCF206-20	1-1/4	4-1/4	3-17/64	45/64	35/64	1-7/32	15/32	1-19/32	1.5	0.626	3/8	SS-UC206-20	SS-F206	1.01
SS-UCF207	35	117	92	19	16	34	14	44.4	42.9	17.5	M12	SS-UC207	SS-F207	1.33
SS-UCF207-20	1-1/4	4-39/64	3-5/8	3/4	5/8	1-11/32	35/64	1-3/4	1.689	0.689	7/16	SS-UC207-20	SS-F207	1.40
SS-UCF208	40	130	102	21	16	36	16	51.2	49.2	19	M14	SS-UC208	SS-F208	1.67
SS-UCF208-24	1-1/2	5-1/8	4-1/64	53/64	5/8	1-27/64	5/8	2-1/64	1.937	0.748	1/2	SS-UC208-24	SS-F208	1.71
SS-UCF209	45	137	105	22	18	38	16	52.2	49.2	19	M14	SS-UC209	SS-F209	2.00
SS-UCF210	50	143	111	22	18	40	16	54.6	51.6	19	M14	SS-UC210	SS-F210	2.32
SS-UCF210-32	2	5-5/8	4-3/8	55/64	23/32	1-9/16	5/8	2-5/32	2.0315	0.748	1/2	SS-UC210-32	SS-F210	2.30
SS-UCF211	55	162	130	25	20	43	19	58.4	55.6	22.2	M16	SS-UC211	SS-F211	3.12
SS-UCF211-32	2	6-3/8	5-1/8	63/64	25/32	1-11/16	3/4	2-5/16	2.189	0.874	5/8	SS-UC211-32	SS-F211	3.27
SS-UCF212	60	175	143	29	20	48	19	68.7	65.1	25.4	M16	SS-UC212	SS-F212	3.95
SS-UCF213	65	187	149	30	22	50	19	69.7	65.1	25.4	M16	SS-UC213	SS-F213	4.81
SS-UCF214	70	193	152	31	22	54	19	75.4	74.6	30.2	M16	SS-UC214	SS-F214	5.42
SS-UCF215	75	200	159	34	22	56	19	78.5	77.8	33.3	M16	SS-UC215	SS-F215	5.94
SS-UCF216	80	208	165	34	24	58	23	83.3	74.95	33.3	M20	SS-UC216	SS-F216	7.89
SS-UCF217	85	220	175	36	25	63	23	87.6	77.9	34.1	M20	SS-UC217	SS-F217	9.18
SS-UCF218	90	235	187	40	25	68	23	96.3	87.85	39.7	M20	SS-UC218	SS-F218	11.20

Housings : AISI304C. Standard Insert Bearings: SS-UC200 : AISI420C (See SS-UC200 for further details) - Other bearings type will fit in these units, See SS-SA200 / SS-SB200 / SS-UCX--

All housings are available seperately without insert. The diagram shows a standard recessed casting, but many units are also available from stock with a solid base - please ask for details

MIDLAND BEARINGS